



extreme environment lighting

Rail2

SKU: 101081


Color Output: White Dimming, Blue Dimming

Finish: Brushed




Lumitec's original rail light amazed customers when it was first introduced in 2008. With up to 3 times greater output than its predecessor and a sleek new look, Rail2 raises the bar. The integrated microprocessor controls dimming and color change from two wires, with no external control modules. As with all Lumitec luminaires, the Rail2 is IP67 compliant, which means despite its great looks it is just at home on a spray-drenched hard top as a teak-adorned salon. Proudly made in the USA.

- Voltage: 10 - 30vDC
- 12vDC Amps: 920mA
- 24vDC Amps: 430mA
- Correlated Color Temperature: 5000
- Color Rendering Index: 70+
- Rated Watts: 12
- Lumens (White): 490
- Operating Temp (°C): -35 to +55 C
- Operating Temp (°F): -31 to + 131 F
- IP67 Compliant
- Certified Ignition Protected

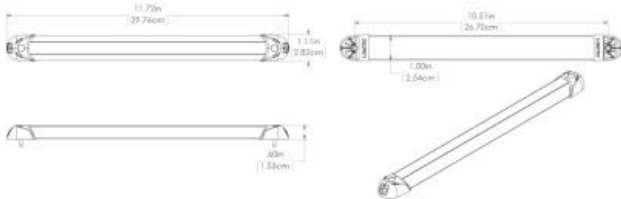

Dimensions: 11.72in (29.76cm) (W) x 1.11in (2.82cm) (H) x 0.60in (1.53cm) (D)

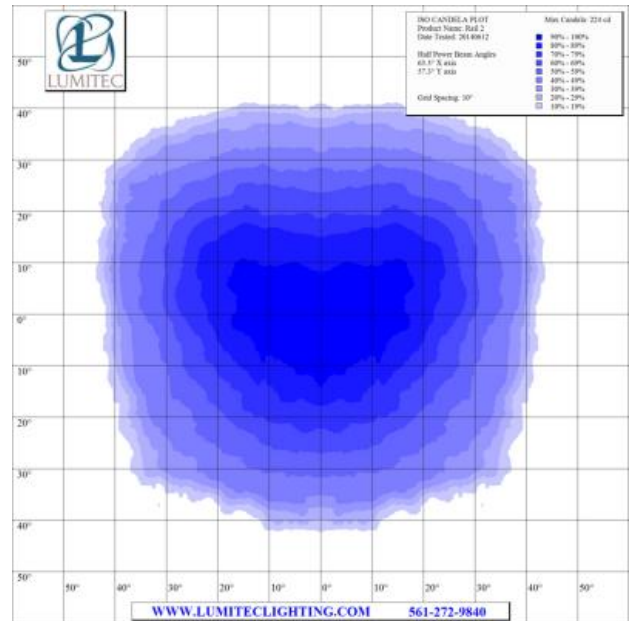

www.lumiteclighting.com | Phone: (561) 272-9840 | info@lumiteclighting.com



ISO LUX PLOT
Product Name: Rail 2
Date Tested: 20140612

Max Lux at 10': 23 lx

Target Distance: 10'
Grid Spacing: 2'

- 90% - 100%
- 80% - 89%
- 70% - 79%
- 60% - 69%
- 50% - 59%
- 40% - 49%
- 30% - 39%
- 20% - 29%
- 10% - 19%

