



extreme environment lighting

Maxillume2

SKU: 101133


Color Output: White Dimming

Finish: Brushed




A blending of Lumitec's two most popular and powerful flood lights. The Maxillume2 offers all the benefits of its predecessors in a smaller, sleeker package, with higher output and a wider coverage area. Maxillume2 delivers the light output equivalent of a 200 to 300 watt halogen light. Designed and manufactured completely in the US, the light boasts a completely sealed marine grade housing and Lumitec's proprietary DeckSweep® technology. This radially asymmetric pattern puts light where you need it most, meaning more useable light and less wasted power. Now with dimming.

- Voltage: 10 - 30vDC
- 12vDC Amps: 2.95A
- 24vDC Amps: 1.38A
- Correlated Color Temperature: 4500
- Color Rendering Index: 70+
- Rated Watts: 36
- Lumens (White): 2100
- Operating Temp (°C): -35 to +55 C
- Operating Temp (°F): -31 to + 131 F

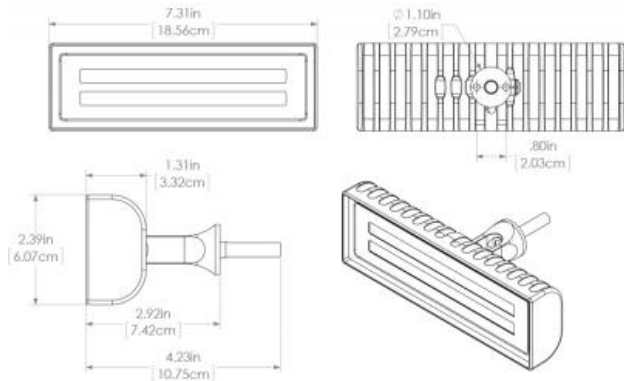

Dimensions: 7.31in (18.56cm) (W) x 2.39in (6.07cm) (H) x 2.92in (7.42cm) (D)

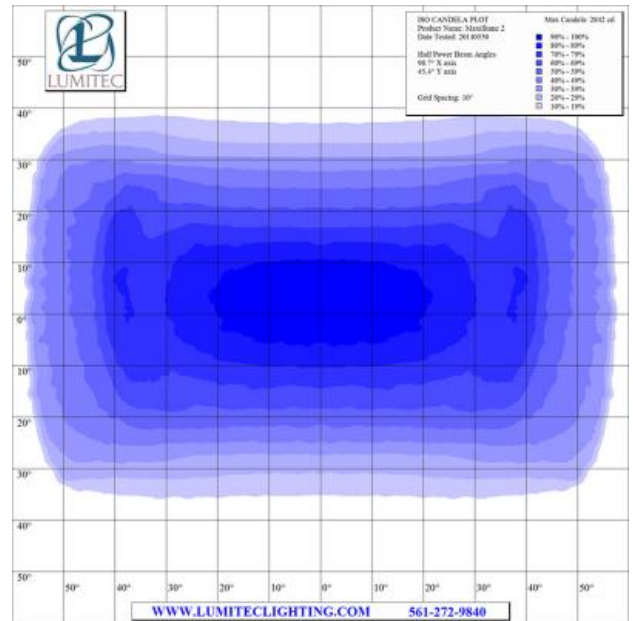

www.lumiteclighting.com | Phone: (561) 272-9840 | info@lumiteclighting.com



ISO LUX PLOT
Product Name: Maxillume 2
Date Tested: 20140530

Max Lux at 10': 302 lx

Target Distance: 10'
Grid Spacing: 2'

- 90% - 100%
- 80% - 89%
- 70% - 79%
- 60% - 69%
- 50% - 59%
- 40% - 49%
- 30% - 39%
- 20% - 29%
- 10% - 19%

