



AquaCharge™ xtreme

CORDLESS WATER PUMP

The AquaCharge™ xtreme portable, rechargeable water pump combines convenient features in a sleek, new, industrial design.

The fully submersible pump has easy operation and is battery operated so it can be taken anywhere. The included charging station allows for easy recharging of the battery to ensure your pump is never inactive due to not having batteries on hand. The AquaCharge xtreme makes for a great back-up sump pump when power is out.

The AquaCharge™ xtreme pump has many convenient features

- Backed by the Rule brand of DC pumps, a brand enjoying over 45 years of operational excellence
- Harsh environment DC motor technology, proven with over 15 million units in use
- Robust and innovative pump technology, proven in over 7 million bilge pumps
- Pumps fresh and salt water, providing dual use with a single product
- Fully submersible, ensuring durable operation in harsh environments
- Ergonomic ON/OFF control knob, allowing simplified rotational operation
- User removable filter, allowing quick and efficient cleaning
- Industry standard NiMH battery, incorporating dependable charging technology
- Pumps up to 600 gallons on a single charge, ensuring adequate operational time for your needs
- Pump head height of up to 17 ft.
- Standard garden hose thread for easy hook-up



rule
Innovation

a xylem brand

AquaCharge™ xtreme CORDLESS WATER PUMP

The AquaCharge™ xtreme Includes



Submersible Pump



Battery and Charging Station


Pump Specifications

Gallons (water) per charge	Approximately 600 gallons (2271 liters)
Charge Time	Approximately 2 hours
Voltage	9.6 volt
Port Size Outlet	Standard garden hose

Packaging Specifications

Weight	7.5 lbs
Dimensions	11" x 11" x 11.5"
Master Pack Size	2 units
Master Pack Weight	16.2 lbs
Master Pack Dimensions	22.5" x 11.5" x 12.125"

Kit Includes

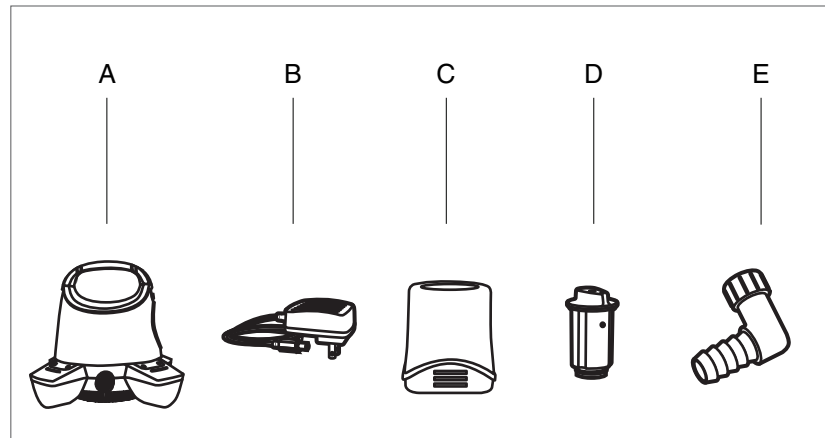

- A. Pump
- B. Charger Power Adaptor
- C. Battery Charger Base
- D. Battery Cartridge
- E. 90 degree nozzle

Model No. AQX600-100



Warranty: All products of the company are sold and all services of the company are offered subject to the company's warranty and terms and conditions of sale, copies of which will be furnished upon request. The information provided herein is for guidance only, it does not constitute a guarantee of the performance or specification of any individual product or component.

www.xylem.com

USA
Xylem, Inc.
100 Cummings Center, 535N
Beverly, MA 01915
Tel: (978) 281-0440
Fax: (978) 283-2619

UK
Xylem, Inc.
Bingley Road, Hoddesdon
Hertfordshire EN11 0BU
Tel: +44 (0) 1992 450145
Fax: +44 (0) 1992 467132

GERMANY
Xylem, Inc.
Oststrasse 28
22844 Norderstedt
Tel: +49-40-53 53 73-0
Fax: +49-40-53 53 73-11

JAPAN
NHK Jabsco Company Ltd.
3-21-10, Shin-Yokohama
Kohoku-Ku, Yokohama, 222-0033
Tel: +81-045-475-8906
Fax: +81-045-477-1162

ITALY
Xylem, Inc.
Via Tommaseo, 6
20059 Vimercate, Milano
Tel: +39 039 685 2323
Fax: +39 039 666 307