


INSTRUCTIONS

STEP 1: Remove strainer base from bottom of pump by depressing the locking tabs on both sides of the pump.

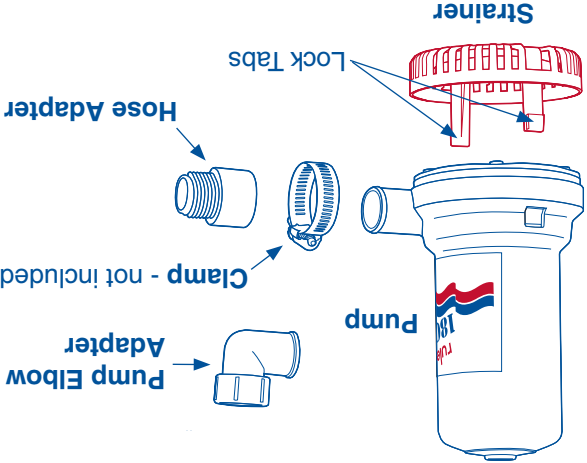

STEP 2: Determine the location for the pump. The pump can be placed in a sump 12" in diameter or on a floor where the water is deepest.

STEP 3: Position the strainer so that the pipe hose is in the desired location.

STEP 4: MOUNTING THE STRAINER

Attach the strainer to wood with two stainless mounting screws. If mounting the pipe into concrete, first fasten a piece of wood to the concrete and then attach the pump to the wood.

STEP 5: Mount the strainer so that both lock-tabs "snap" into place.



©Rule Registered Trademark

rule® SUMP & UTILITY PUMP

1800 GPH HIGH PERFORMANCE

INSTALLATION MANUAL

110 VOLT AC

ALL RETURNS MUST BE SHIPPED TO:
ITT CORPORATION
CAPE ANN INDUSTRIAL PARK
GLOUCESTER, MA 01930

A WRITTEN EXPLANATION OF RULE'S
THREE YEAR LIMITED WARRANTY
POLICY IS AVAILABLE UPON
REQUEST BY CALLING:
RULE CUSTOMER SERVICE
978-281-0573



IMPORTANT SAFETY INSTRUCTIONS

1. READ AND FOLLOW ALL INSTRUCTIONS

- WARNING** TO REDUCE THE RISK OF INJURY, DO NOT PERMIT CHILDREN TO USE THIS PRODUCT UNLESS CLOSELY SUPERVISED BY AN ADULT.
- WARNING** RISK OF ELECTRICAL SHOCK. THIS PUMP IS PROVIDED WITH A THREE-PRONG GROUNDING PLUG FOR USE WITH A 110V AC 3-PRONG OUTLET. A SHOCK HAZARD EXISTS IF THE PLUG IS CONNECTED TO AN UNGROUNDED OUTLET. CONNECT ONLY TO A GROUNDING-TYPE RECEPTACLE PROTECTED BY A GROUND-FAULT CIRCUIT INTERRUPTER (GFCI). CONTACT A QUALIFIED ELECTRICIAN IF YOU CANNOT VERIFY THAT THE RECEPTACLE IS PROTECTED BY A GFCI.
- WARNING** DO NOT BURY CORD. LOCATE THE CORD SO THAT IT IS VISIBLE TO AVOID ANY CONTACT WITH LAWN MOWERS, HEDGE TRIMMERS OR OTHER POWER EQUIPMENT.
- WARNING** TO REDUCE THE RISK OF ELECTRICAL SHOCK, REPLACE DAMAGED CORD IMMEDIATELY.
- WARNING** TO REDUCE THE RISK OF ELECTRICAL SHOCK, DO NOT USE AN EXTENSION CORD TO CONNECT THE PUMP TO A POWER SUPPLY.
- WARNING** DO NOT PLUG THE PUMP INTO AN OUTLET WHILE STANDING IN WATER OR ON A DAMP SURFACE.

8. SAVE THESE INSTRUCTIONS

STEP 6: Attach the discharge nozzle of the Rule 1800 GPH pump to either the 90-degree elbow or the garden hose adapter enclosed. Always use a stainless steel hose clamp when connecting either fitting.

NOTE: Restricting the flow from a Rule pump by using smaller pipe or hose will not damage the pump, but will result in a reduction in flow.

from the outlet.

The Rule 1800 GPH Sump and Utility Pump is designed for manual operation only. When the 3-prong plug is connected to a 3-prong GFI protected outlet, the pump will begin pumping and will continue until the unit is unplugged from the outlet. It is important to keep the strainer free and clean of debris which will restrict the flow of the pump.