

RapidFire™ Strobe

Pull-pin Inflatable PFD Strobe Product No. 3961.1

Small compact, rugged, waterproof; packs inside inflatable life jacket or attaches to standard life vest

Provides location lighting to USCG requirements for 6 hours

Pull-pin activation: automatically activates with PFD inflates or if manually pulled

Adjustable flash shield for optimum eye protection

Pull-pin lanyard clips to bottom of inflation chamber


Light test feature with "Test Key" to ensure readiness—can be tested many times

Easy to mount—fits on inflation tube via o-ring which will not damage inflation tube or fits on any strap of conventional life jacket

"Tamper Tab" breaks to indicate light has been activated

Long term storage lithium battery—10 year storage life (remove from service after 5 years)

Operation life—approximately 8 hours continuous at -20°C (-4° F)

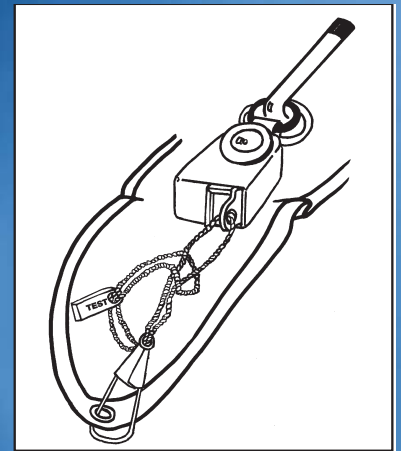

Size:	3.1 x 1.8 x 1.6" (7.9 x 4.6 x 4.1 cm)
Weight:	2.3 oz (65 g)
Material:	UV stabilized composite polymer
Color:	Hi-vis yellow
Operation:	Pull-pin activation; automatic on some vests, manual activation when pulled by hand
Waterproof:	10 ft (3.1 m)
Beam Angle:	Omnidirectional 360°
Visibility:	Over 1 mile (1.6 k)
Flash Rate:	60 flashes per minute \pm 10 for 4 hours; rate slows to 20/min during last 4 hours
Lamp:	Xenon flash tube
Battery Type:	Lithium; 10 year storage life (5 yr. expiry)
Limited Warranty:	1 year
Carton Dimensions:	9.5 x 12 x 6 (24 x 31 x 15 cm)
Units Per Carton:	12
Carton Weight:	3.4 lbs (1.35 kg)
Operational Life:	Approximately 8 hours continuous at -20° (-4° C)



ACR Electronics, Inc.
5757 Ravenswood Rd.
Fort Lauderdale, FL 33312, U.S.A.
Tel Worldwide: +1(954) 981-3333
Fax: +1(954) 961-4403
www.acrelectronics.com

COBHAM
Avionics & Surveillance

ACR Electronics, Inc. is registered by UL to ISO 9001-2000