

TSM800C 8" Vessel Monitoring and Control Touchscreen

The TSM800C is an 8" dedicated touchscreen that includes Maretron's N2KView® vessel monitoring and control software. The N2KView® software allows you to configure as many favorite screens as you want with exactly the information you want to see. The TSM800C provides an extremely simple touch interface for monitoring and controlling critical systems from anywhere on the vessel.

The TSM800C is ruggedized for marine use and includes a solid state disk drive to withstand the pounding associated with waves. And since the TSM800C only dissipates 20 watts, there is no need for internal cooling fans that are noisy and wear out causing electronics to overheat and fail. The TSM800C can be mounted outside given the high bright screen and waterproof front.

As an alternative to controlling the TSM800C through the touch screen, the TSM800C includes two USB ports for connecting keyboards, mice, or trackballs. The TSM800C also has an Ethernet port for connecting Internet Protocol (IP) cameras for viewing within the N2KView® software. Lastly, the TSM800C contains two completely isolated CAN bus connectors (M12) for easy connection to single or redundant NMEA 2000® networks.




TSM800C features:

- 8" TFT LCD Panel, LED Backlit
- Widescreen Aspect Ratio 5:3
- 800 x 480 Pixels
- 600 nits Brightness (Optically Bonded)
- Solid State Disk Drive
- Fanless Cooling System
- Flush or VESA Mounting
- Dual CAN Bus for Single or Redundant NMEA 2000® Network Connections

Products

PART NUMBER	DESCRIPTION
TSM800C-01	8" Vessel Monitoring and Control Touchscreen (Direct NMEA 2000 Connection)

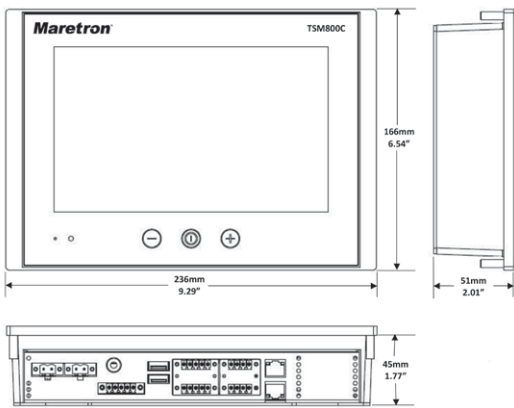


Specifications

Parameter	Value	Comment
Display Size	8"	LED Backlit LCD with Projected Capacitive Touch Screen
Display Resolution	800x480	WVGA
Display Brightness	600cd/m2	Optically Bonded
Contrast Ratio	600:1	
LCD Color	262K	
Viewing Angle	70° H, 60° V	
Buzzer	85dB	
USB Ports	Two USB 2.0	
Ethernet Ports	One RJ-45 GbE	For connection to Maretron IPG100 or router
Controller Area Network (CAN) Ports	Two Waterproof (M12)	Dual NMEA 2000® Connection
Compass Safe Distance	45cm	Standard
	25cm	Steering

Approvals

Parameter	Comment
IEC 60945	
GL – Germanischer Lloyd	
BV – Bureau Veritas	
IACS E10	
DNV - Det Norske Veritas	
LRS – Lloyd's Register of Shipping	Pending
ClassNK – Nippon Kaiji Kyoaki	
ABS – American Bureau of Shipping	
NMEA 2000®	

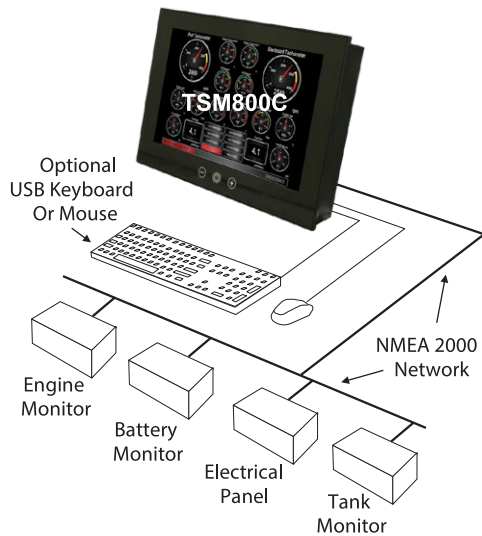

Electrical

Parameter	Value	Comment
Operating Voltage (Dedicated Supply Connection)	18-32 Volts	DC Voltage, Dual Inputs
Power Consumption (Dedicated Supply Connection)	20 Watts	Typical
	30 Watts	Maximum
Operating Voltage (NMEA 2000® Connection)	8 – 32 Volts	DC Voltage
Power Consumption (NMEA 2000® Connection)	50mA	
Load Equivalence Number (LEN)	1	NMEA 2000® Spec. (1 LEN = 50 mA)
Reverse Battery Protection (NMEA 2000® Connection)	Yes	Indefinitely
Load Dump Protection (NMEA 2000® Connection)	Yes	Energy Rated per SAE J1113

Mechanical

Parameter	Value	Comment
Overall Dimensions (DxWxH)	2.28" x 13.98" x 9.78" (58mm x 355mm x 248.5mm)	
Weight	9.7 lbs (4.4kg)	
Front Panel Material	Glass	
Front Panel Controls	Power, Brightness +/-	
Mounting	4 x M4 VESA Mounting 75mm x 75mm	Max 8mm deep
	Built-in Console Mounting	4 x M5 x 15mm screws

Environmental

Parameter	Value
Operating Temperature	-15°C to 55°C (Humidity up to 95%)
Storage Temperature	-20°C to 60°C (Humidity up to 95%)
IP Rating	IP66 Front, IP22 Rear (EN60529)

TSM800C Screen Shots

