

HIGH OUTPUT ALTERNATOR

The Highest Power Output Alternator in its Size/Class








- Engineered for High Energy Production.
- Suitable for Marine, RV, Military, and Commercial applications.
- High-density, ultra-efficient stator winding produces maximum energy output.
- Rapidly charges large battery banks.
- Coolest operating temperatures for increased performance. Runs 8 - 20% cooler than incumbent alternators due to:
 - Heat-shedding coatings
 - Rectifier located on housing exterior
 - Dual cooling fans
 - OEM components
- Optimized for performance at idle speeds.
- Reduces need for generator by creating additional power with your engine.
- Unleash peak performance with E-Coat/ Cerakote. Our advanced coating dissipates heat, keeping the A225s cooler. This translates to more amperage for sustained periods.
- For maximum performance or lithium battery charging, use an ARCO Zeus Alternator Regulator.
- SAE J1171 Certified.



	3.15″ J180	1″-2″	Vortec
Side View	-		
Front View			
Top View			

IN A CLASS OF ITS OWN... GET AMPED

The ARCO Zeus A225s introduces the highest power density of any alternator in its class

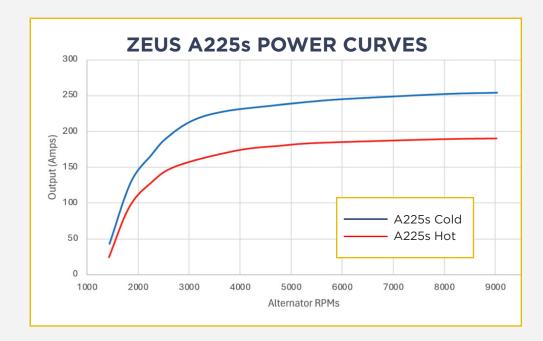

TRANSPARENCY IN OUR TESTING

*To measure sustained HOT output, the alternator is run at 3,000 RPMs for 60 minutes with a plexiglass shield covering the unit. After 60 minutes in these conditions, alternators reach their maximum operating temperature. It is under these harsh conditions where we measure the "HOT" output of the units at various RPMs (see above). The complete power "COLD" testing was done at 71° F (21.5° C).

Voltage	Maximum Output(Amps)	Sustained Idle Output*(Amps)	Housing	Regulation	Pulley	Release Date	Unit Part #
12V	254	187	Vortec (GM)	External Only	49mm K6 (6 groove)	June, 2024	A225s-12-VT-EX-49K6
12V	254	187	Vortec (GM)	Internal or External	49mm K6 (6 groove)	June, 2024	A225s-12-VT-IE-49K6
12V	254	187	1"-2" Single Foot	External Only	49mm K6 (6 groove)	June, 2024	A225s-12-SF12-EX-49K6
12V	254	187	1"-2" Single Foot	Internal or External	49mm K6 (6 groove)	June, 2024	A225s-12-SF12-IE-49K6
12V	254	187	3.15″ J180	External Only	49mm K6 (6 groove)	June, 2024	A225s-12-DF315-EX-49K6
12V	254	187	3.15″ J180	Internal or External	49mm K6 (6 groove)	June, 2024	A225s-12-DF315-IE-49K6

*3,000 alternator RPM sustained under load and hot conditions for 1 hour.



SPECIFICATIONS

Voltage	12V	
Field Type	Р	
Rotor Poles	16	
Stator Size	130mm	
Frame Size	Small	
Weight	12 lbs / 5.4 kg	
Regulation	Internal/External (IE) or External Only (EX)	
Output Voltage	14.1V (default)	
Finish	(Black) Cerakote or E-coating	
Cut-In Alt. RPM	1,196	
Maximum Alt RPM	19,000	
Battery Post	M8 Thread Post, Side Mount	
Standard Pulley	49K6 (6-groove, 49mm); 50mm Clutch Pulley (Optional)	
Pulley Mount	17mm diameter shaft, 25mm long, threaded M17 x 1.5	
Pulley Hardware	M17 x 1.5 x 24mm nut, w/ 18mm ID x 29mm OD washer (Included)	
Diodes	6 positive, 6 negative, 50A Rated, Avalanche	
Max Output (Cold, 9,000 RPM)	254 Amps	
Sustained Cruising Output (Hot, 6,000 RPM)	187 Amps	
Sustained Idle Output (Hot, 3,000 RPM)	157 Amps	
Max Continuous Operating Temperature	110°C/230°F	

APPLICATIONS

Mounting	ARCO Part Number	Application
1-2" Single Foot	A225s-12-SF12-EX-49K6 A225s-12-SF12-IE-49K6	Replaces most domestic styles using a single 1" or 2" mounting foot (e.g., Motorola, Prestolite)
3.15" J180 Saddle	A225s-12-DF315-EX-49K6 A225s-12-DF315-IE-49K6	Replaces most small case styles using a 3.15″ J180 saddle style mount (e.g., Hitachi, Lucas, Mitsubishi) Most Yanmars.
Vortec	A225s-12-VT-EX-49K6 A225s-12-VT-IE-49K6	Replaces Mando type alternators using Vortec/ GM pad mounting feet (FoundonmanyMercruiserandVolvoPenta3.0GLM,3.0GLP,4.3GXi,5.7GiL,5.7GXiLMarineEngines.) (GM Blocks)



ARCO'S BEST IN CLASS WARRANTY AT YOUR SERVICE Register for your warranty at arcomarine.com/arco-product-registration 1 year parts and labor with a second year extension if registered within 30 days.



ARCOMARINE.COM sales@arcomarine.com

Toll Free: 1-800-722-2720 Fax: 850-453-2630

3921 W. Navy Blvd. Pensacola, FL 32507