


The BM-1 compact is designed to monitor performance of 12 volt lead acid battery systems with capacities of up to 600 Amp hours. It is supplied complete with a precision 100 AMP shunt and a prefabricated cable assembly to enable simple DIY installation.

BM-1 Compact

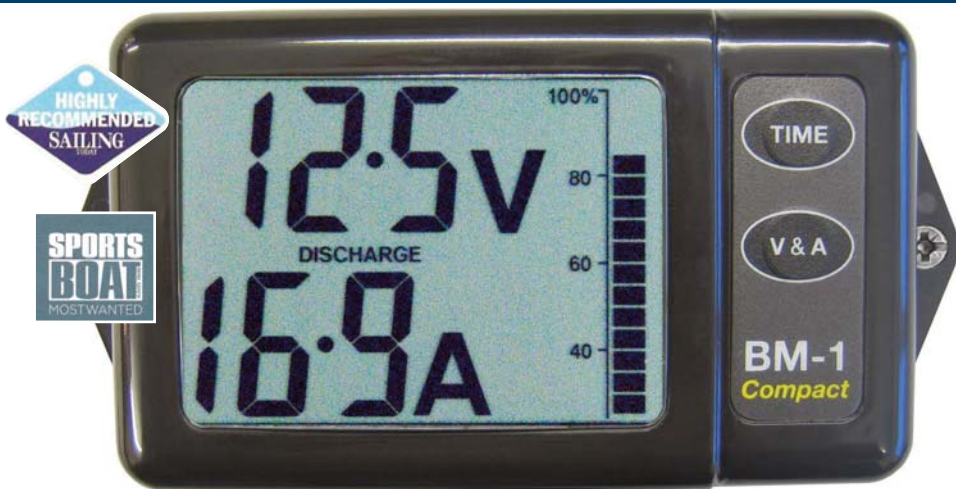

ACTUAL SIZE - Also available in white

The unit continuously monitors voltage, current (charge or discharge), number of amp/hours (charge or discharge), the battery's state of charge and the time to charge or discharge. This information leads to more efficient use of the battery, which can enhance battery life and reduce the risk of failure.

Cables supplied

100 AMP shunt link to M8 Ring terminal.

5 Metre from display unit to battery - fused and fitted with ring terminals for shunt, fuse holder and M8 ring terminal to battery.

Specifications

- Compact size 125 x 62 x 23mm with high contrast LCD
- Supply current 1.5 milliamps
- Battery capacities 5 - 600 AMP hour
- Load current 100 AMPS Maximum
- Supplied with precision shunt and prefabricated cables for simple DIY installation.
- 24V version available

