



**extreme environment lighting**

**Aurora**

SKU: 101139


Color Output: White Dimming, Red Dimming

Finish: Polished Stainless Steel




Our customers told us they wanted a high quality LED replacement for the ubiquitous dome light. It had to be bright, with wide even light. They wanted a clean look, an intuitive and reliable switch, and a notable level of quality. We delivered, and then added IP67 immersion protection. We then raised the bar with multiple color output options and dimming. Lumitec's Aurora Dome Light stands apart.

- Voltage: 10 - 30vDc
- 12vDC Amps: 290mA
- 24vDC Amps: 160mA
- Correlated Color Temperature: 5000
- Color Rendering Index: 70+
- Rated Watts: 4
- Lumens (White): 180
- Operating Temp (°C): -35 to +55 C
- Operating Temp (°F): -31 to + 131 F
- IP67 Compliant
- Certified Ignition Protected

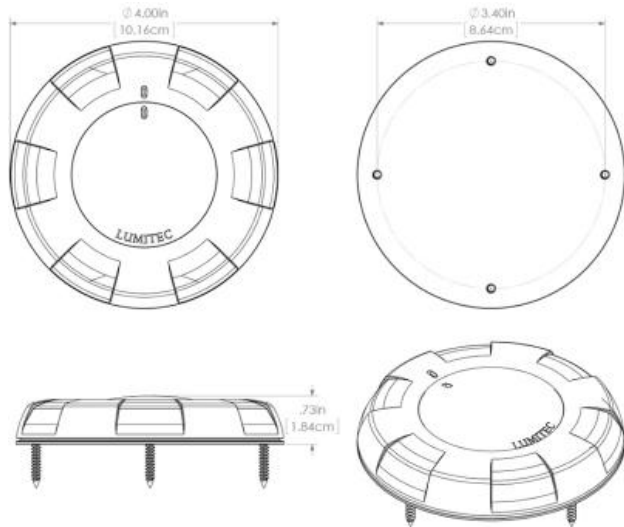

Dimensions: 4.00in (10.16cm) (W) x 4.00in (10.16cm) (H) x 0.73in (1.84cm) (D)

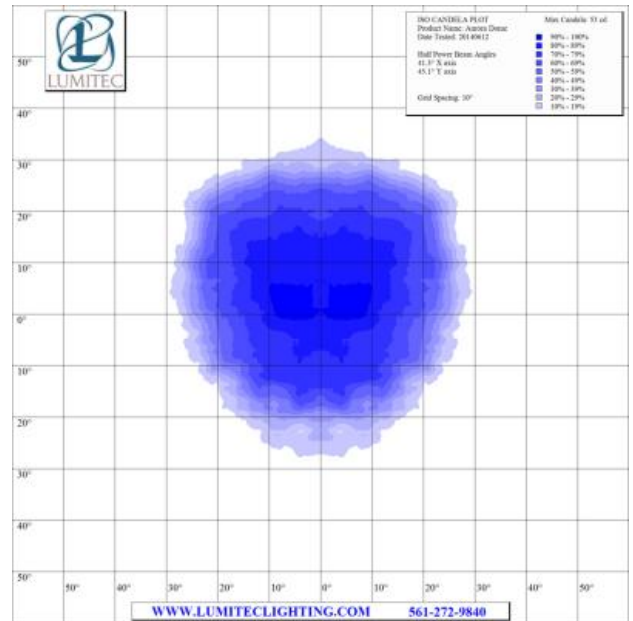

www.lumiteclighting.com | Phone: (561) 272-9840 | info@lumiteclighting.com



ISO LUX PLOT  
Product Name: Aurora Dome  
Date Tested: 20140612

Max Lux at 10': 5 lx

Target Distance: 10'  
Grid Spacing: 2'

- 90% - 100%
- 80% - 89%
- 70% - 79%
- 60% - 69%
- 50% - 59%
- 40% - 49%
- 30% - 39%
- 20% - 29%
- 10% - 19%

