



extreme environment lighting

TouchDome

SKU: 101098



Color Output: White Dimming, Red Dimming

Finish: Polished Stainless Steel




Brilliantly designed. That is what you will think when you use Lumitec's innovative new Touch Dome. Of course the light is completely sealed and has no o-rings, baffles, or switches to wear out. But more impressively, unlike old-technology capacitive or e-field switches, the Touch Dome is reliable even when wet or with gloves. Proprietary Optical Field Sense technology provides on, off, color change and even dimming. Beautifully designed, elegantly functional.

- Voltage: 10 - 30vDC
- 12vDC Amps: 410mA
- 24vDC Amps: 215mA
- Correlated Color Temperature: 5000
- Color Rendering Index: 70+
- Rated Watts: 6
- Lumens (White): 244
- Operating Temp (°C): -35 to +55 C
- Operating Temp (°F): -31 to + 131 F
- IP67 Compliant
- Certified Ignition Protected

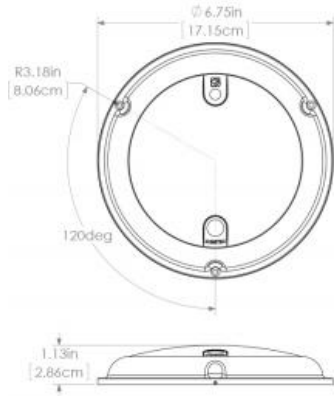

Dimensions: 6.75in (17.15cm) (W) x 6.75in (17.15cm) (H) x 3.18in (8.06cm) (D)

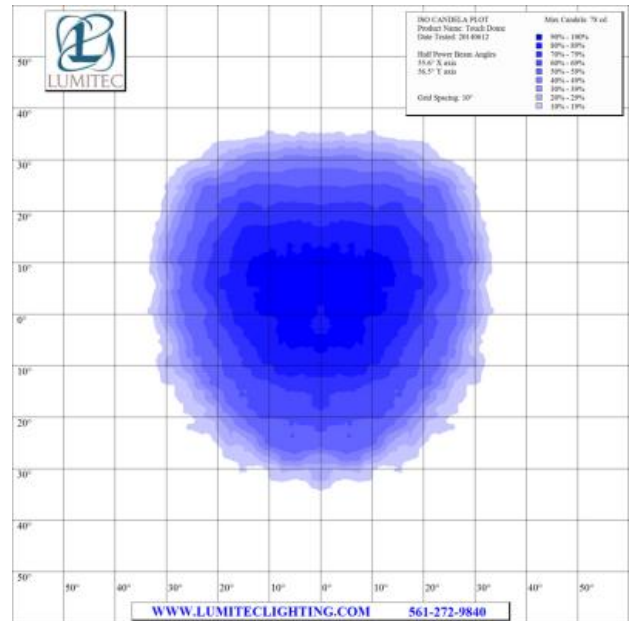

www.lumiteclighting.com | Phone: (561) 272-9840 | info@lumiteclighting.com



ISO LUX PLOT
Product Name: Touch Dome
Date Tested: 20140612

Max Lux at 10': 8 lx

Target Distance: 10'
Grid Spacing: 2'

- 90% - 100%
- 80% - 89%
- 70% - 79%
- 60% - 69%
- 50% - 59%
- 40% - 49%
- 30% - 39%
- 20% - 29%
- 10% - 19%

