



# Portable RV Waste Pump

ANOTHER ENGINEERED PRODUCT, RESPONDING TO CUSTOMER NEEDS

## Draining your waste tanks just got easier.

The portable RV waste pump is designed to greatly improve one of the least desirable functions of the RV experience. It cleanly handles both the black and the grey water from your holding tanks with this self priming, powerful macerator pump. The pump housing is designed to connect onto the standard three inch waste outlet. Six foot power leads with plug may be permanently attached to the vehicle or battery clips may be attached for complete portability.

The discharge port is a standard garden hose connector and the macerator section grinds waste down to a particle size of 1/8" maximum. This allows you to pump longer distances and empty your holding tanks into a portable tank, toilet, sewer clean-out port or septic tank.

## Features

- Connects directly to the RV waste outlet
- Eliminates 3" sewer hose
- Garden hose discharge port
- Fresh water rinse capabilities
- Remote handheld on/off switch with 6' wire harness
- Ability to dump longer distances
- Ability to drain holding tanks at home
- Easy cleanup and storage
- Rugged portable storage case



**FLOJET**  
a xylem brand

# Portable RV Waste Pump

ANOTHER ENGINEERED PRODUCT, RESPONDING TO CUSTOMER NEEDS

## Specifications

Model Number	18555 000
UPC-A	7 0547425005 9
Pump	Self-Priming Flexible Impeller with Stainless Steel Wearplate
Impeller	"Jabsco Nitrile" compound
Macerator	Stainless Steel Cutter reduces particle size to 1/8" (3mm) maximum
Seal	Lip Type
Ports	Inlet - 3" RV connector Outlet - Garden hose 5/8" - 25ft (7.5m) 3/4" - 50ft (15m)
Motor	12V DC permanent Magnet Type, Fully Enclosed, with Stainless Steel Shaft
Weight	6lb (2.8kg) Approx.
Case Size	12" x 13" x 5.5" (300mm x 315mm x 140mm)

This pump should be used in accordance with EPA Sanitation Regulations


## Head Capacity Table\*

Discharged Head		GPM	LPM	Amps
Feet	Metres			
Free flow	0	12.5	47	14.0
5	1-1/2	11.5	44	14.5
10	3	10.5	40	15.0
15	4-1/2	9.0	34	16.0
20	6	7.5	28	16.5

\*Flow rates and amperage will vary slightly depending on pump loading (sanitation system design).

## Impeller Release Feature

After long periods of non-use, a stuck impeller can be easily broken loose with a screwdriver inserted in motor shaft slot. Simply turn shaft clockwise as shown.

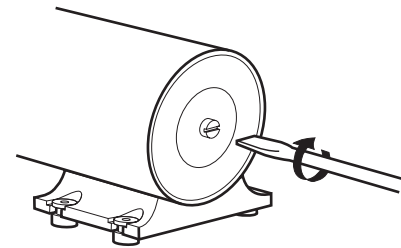


## Applications

- Empty holding tanks and avoid dump stations
- Transfer waste from recirculating toilets to main holding tank

## Easy To Install

When installed, the waste pump can be used to empty the holding tank into any convenient sewer receiver such as a sewer clean-out at your home.

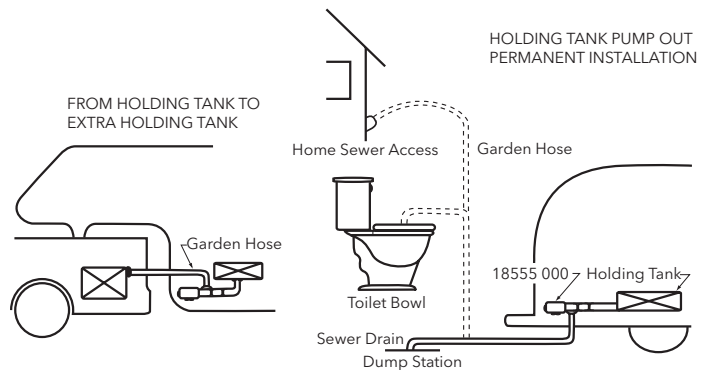

Warranty: All products of the company are sold and all services of the company are offered subject to the company's warranty and terms and conditions of sale, copies of which will be furnished upon request. The information provided herein is for guidance only, it does not constitute a guarantee of the performance or specification of any individual product or component.

[www.xyleminc.com](http://www.xyleminc.com)

USA  
Xylem, Inc.  
17942 Cowan  
Irvine, CA 92614  
Tel: (949) 608-3900  
Fax: (949) 609-3887

UK  
Xylem, Inc.  
Patrick Gregory Road,  
West Midlands, WV11 3DZ, UK  
Tel: +44 (0) 1902-305678  
Fax: +44 (0) 1902-305676

GERMANY  
Xylem, Inc.  
Oststrasse 28  
22844 Norderstedt  
Tel: +49-40-53 53 73-0  
Fax: +49-40-53 53 73-11

JAPAN  
NHK Jabsco Company Ltd.  
3-21-10, Shin-Yokohama  
Kohoku-Ku, Yokohama, 222-0033  
Tel: +81-045-475-8906  
Fax: +81-045-477-1162

ITALY  
Xylem, Inc.  
Via Tommaseo, 6  
20059 Vimercate, Milano  
Tel: +39 039 685 2323  
Fax: +39 039 666 307