

MBB300C *Maretron Black Box Vessel Monitoring and Control*

Maretron's third generation Black Box (MBB300C) is a dedicated processing unit that includes Maretron's N2KView® vessel monitoring and control software. Unlike a PC that allows any software to be loaded, the MBB300C runs only N2KView® software making it extremely stable and dedicated to monitoring and controlling your vessel.

The MBB300C is ruggedized for marine use and includes a solid state disk drive to withstand the pounding associated with waves. And since the MBB300C dissipates less than 10 watts, there is no need for internal cooling fans that are noisy and wear out causing electronics to overheat and fail.

The MBB300C connects to a monitor through a VGA connector or an HDMI connector while the associated touch screen connects through a USB or serial port. Alternatives to controlling the N2KView® software through a touch screen include keyboards, mice, or track balls connected through USB. In addition to the two completely isolated CAN bus connectors for simple connection to single or redundant NMEA 2000® networks, the MBB300C has an Ethernet port for connecting Internet Protocol (IP) cameras for viewing within the N2KView® software.






Of course you get the same flexibility using Maretron's N2KView® software from the MBB300C as you would running the software on a PC, which includes the ability to configure as many screens as you want with exactly the information you want to see. Plus you get free upgrades to the software as improvements and new features are added.

- 9-36 Volt Power Supply
- Solid State Disk Drive
- Fanless Cooling System
- Dual CAN Bus for Single or Redundant NMEA 2000® Network Connections
- Four USB Ports for Touchscreen, Keyboard, Mouse, Trackball, or Thumb Drive Connections
- VGA or HDMI Video Connection (2560 x 1600 Maximum Resolution)
- Ethernet Connector for IP Camera Input, Email Alert Notification, and Maretron Analytic Cloud Service

Products

PART NUMBER	DESCRIPTION
MBB300C-01	Black Box Vessel Monitoring and Control

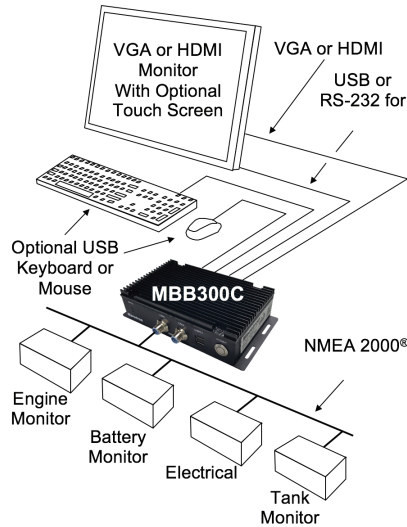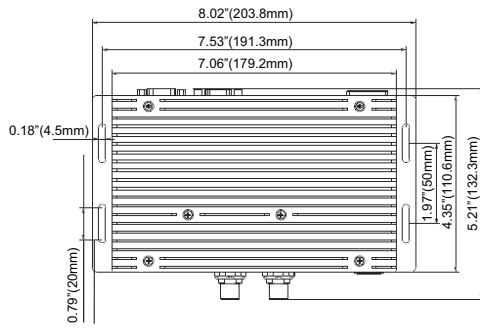

Specifications

Parameter	Value	Comment
Video Connector	VGA Port HDMI Port	For Monitor Connection
Monitor Resolution	2560 × 1600 Maximum (VGA) 1920 × 1080 Maximum (HDMI)	
USB Connector	Two USB 3.0 connections Two USB 2.0 connections	For connecting Peripherals (Mouse, keyboard, etc.) and/or touch screen connectivity
Serial Connector	One RS232 9-Pin D Connector	For touch screen alternative connection
Touchscreen Drivers	TSHARC, 3M MicroTouch, ELO, eGalax, General Touch	Compatible with HID touch compliant panels
Ethernet Connector	RJ-45 GbE	For connection to IP cameras
Controller Area Network (CAN) Ports	Two NMEA 2000 Micro-C Connectors	

Certifications

Parameter	Comment
FCC class A and CE Mark	Electromagnetic Compatibility
NMEA 2000®	

Electrical






Parameter	Value	Comment
Operating Voltage (Dedicated Supply Connection)	9–36 Volts	DC Voltage
Power Consumption (Dedicated Supply Connection)	10 Watts	Maximum
Operating Voltage (NMEA 2000® Connection)	8–32 Volts	DC Voltage
Power Consumption (NMEA 2000® Connection)	80 mA	Maximum When Transmitting 100%
Load Equivalence Number (LEN)	1	NMEA 2000® Spec. (1 LEN = 50 mA)
Reverse Battery Protection (NMEA 2000® Connection)	Yes	Indefinitely
Load Dump Protection (NMEA 2000® Connection)	Yes	Energy Rated per SAE J1113

Mechanical

Parameter	Value	Comment
Overall Dimensions (DxWxH)	6.02" × 9.76" × 1.73" (132 mm x 204 mm x 49 mm)	Excluding Connectors and Wall Brackets
Weight	2.27 lbs (1.03 kg)	
Chassis Material	Aluminum	
Mounting	VESA 100, Wall Bracket, DIN Rail	Any Orientation

Environmental

Parameter	Value
Operating Temperature	-20°C to 70°C
Storage Temperature	-40°C to 85°C
Humidity	10%–85% RH non-condensing

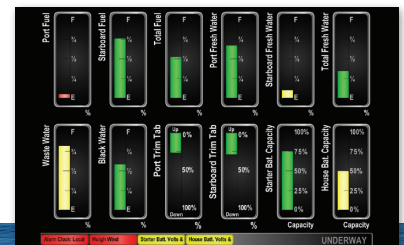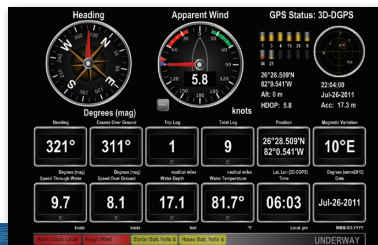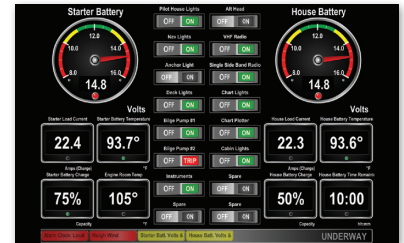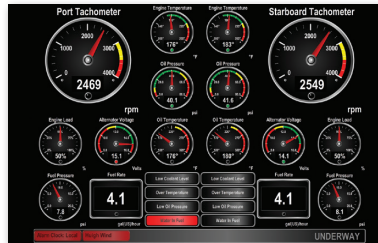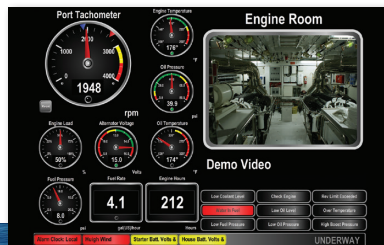

Copyright 2016 Maretron, LLP. All rights reserved. As Maretron is constantly improving its products, all specifications are subject to change without notice. Maretron's products are designed to be accurate and reliable; however, they should be used only as aids to navigation and vessel monitoring, and not as a replacement for traditional navigation and vessel monitoring techniques. A prudent captain or navigator never relies on a single source for navigation or system monitoring information. "NMEA 2000" is a registered trademark of the National Marine Electronics Association.