


RI-SERIES™

The Rigid Industries RI-Series is a full line of flashlights that offer high-output LED technology in a compact package. Inspired by tactical flashlights developed for military and law enforcement, the RI-Series couples cutting edge LEDs with machined aluminum reflectors to create a rugged, powerful light source. With a military-grade hard anodized aluminum housing, waterproof construction, rechargeable battery, and many more features, the RI-Series can withstand the elements and provide years of trouble-free operation.



LIGHTS COME WITH

- Anti-Roll
- Pocket Clip (Excludes RI-600)
- Lanyard
- AC/DC Car Charger
- 110 Volt Wall Charger
- Rechargeable Lithium Ion Battery(s)
 - (1) RI-600 & RI-800
 - (2) RI-1100 & RI-1500

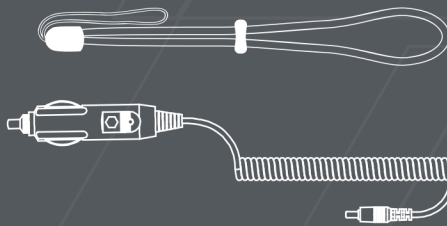

**THE POWER
OF RIGID IN
YOUR
HANDS**




FEATURES

- 50,000+ Hour Lifespan
- Impact Resistant Polycarbonate Lens
- IP67 Compliant - Dust / Water Ingress
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- High, Medium, Low, And Strobe Modes
- High Intensity Spot Reflector Design
- Thermally Regulated LED Circuit
- Momentary Tail-Cap Switch
- Type 3 Military Grade Hard Anodized Aluminum
- Polished Aluminum Reflector
- RI-600 is Available in Red, Blue, Green, Infrared and UV LEDs
- Tactical Bezel Housing (Excludes RI-600)
- Textured Pattern On Handle For Grip
- Works with 18650 Li-Ion or CR123 Batteries
- Limited Lifetime Warranty
- Holsters Also Available (Sold Separately)



DIMENSIONS

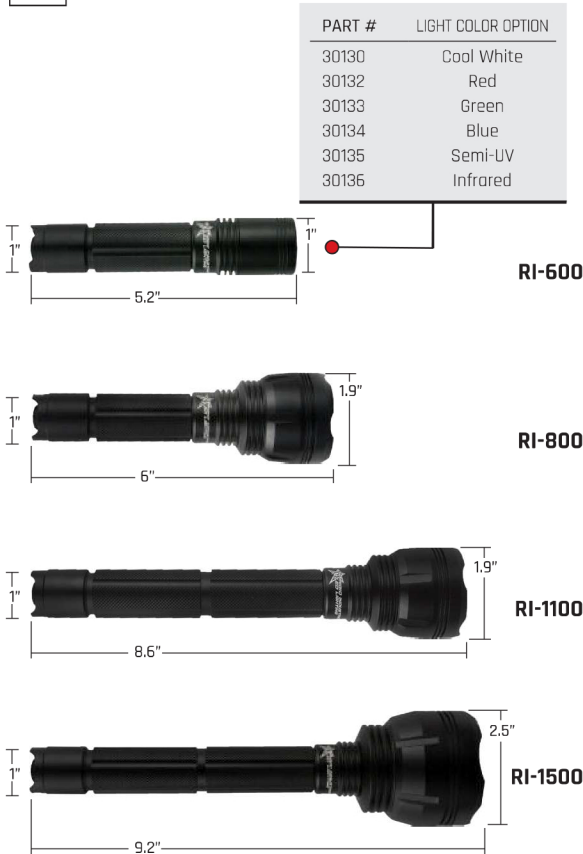

SPECIFICATIONS



PART NO.	MODE	*RAW LUMENS	EFFECTIVE LUMENS	BATTERY RUN TIME	LUX @ 10mV	BEAM DISTANCE (m) w/1 LUX	**PEAK BEAM INTENSITY (cd)
30130 (Cool White)	HIGH	680	620	1.8 hrs	69	165	6945
	MED	250	210	6.5 hrs	27	104	2710
	LOW	80	60	24 hrs	7	51	669
30140 (Cool White)	HIGH	820	768	1.6 hrs	231	304	23174
	MED	300	273	5.5 hrs	95	195	9560
	LOW	100	81	18 hrs	27	105	2740
30150 (Cool White)	HIGH	1100	960	2.1 hrs	253	318	25340
	MED	300	273	9 hrs	95	195	9560
	LOW	100	81	26 hrs	27	105	2740
30160 (Cool White)	HIGH	1500	1340	1.2 hrs	602	490	60202
	MED	475	412	3.7 hrs	224	299	22476
	LOW	150	104	16.5 hrs	51	145	5167

* Raw Lumens is based on LED manufacturer specifications.**Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.