




SLAMMER® IV



- Full Metal Body and sideplate
- CNC Gear Technology with brass main gear
- IPX6 Sealed body and spool design
- Sealed Slammer® drag system with Dura-Drag™ (Sizes 3500-10500)
- HT-100™ carbon fiber drag washers (Size 2500 only)
- 8+1 stainless steel bearing system
- Hydrophobic Line Roller Bearing
- Spare EVA handle knob (Sizes 3500-10500)

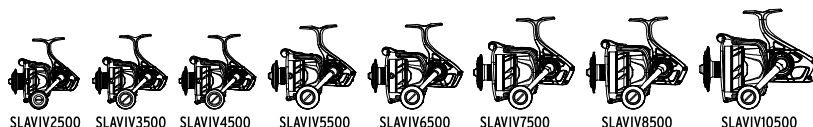

High Speed models designated by gold, laser etched knob caps



Dura Drag washers virtually eliminate hesitation, even under extreme drag settings



Durability, Smoothness, and Precision is what CNC Gear™ Technology delivers. By using state of the art software and CNC machinery the drive and pinion gear are cut to exact tolerances using premium metals.



Submersible IPX6 Sealed Body and Spool Design

Model	Material #	Mono Cap (yds/lb)	Braid Cap (yds/lb)	Bearings	Max Drag	Gear Ratio	Line Retrieve (in)	Weight (oz)
SLAIV2500	1545759	175 / 8	220 / 15	9	20 lbs	6.2:1	33 in	11
SLAIV2500HS	1545760	200 / 8	250 / 15	9	20 lbs	7.0:1	39 in	11
SLAIV3500	1545761	285 / 8	270 / 15	9	30 lbs	6.2:1	37 in	13.9
SLAIV4500	1545762	320 / 10	320 / 20	9	30 lbs	6.2:1	40 in	15
SLAIV4500HS	1545763	340 / 10	340 / 20	9	30 lbs	7.0:1	46 in	15
SLAIV5500	1545764	330 / 12	380 / 30	9	40 lbs	5.6:1	39 in	22.2
SLAIV5500BLS	1545765	330 / 12	380 / 30	9	40 lbs	5.6:1	39 in	22.1
SLAIV6500	1545766	345 / 15	410 / 40	9	40 lbs	5.6:1	42 in	24.2
SLAIV6500HS	1545767	385 / 15	455 / 40	9	40 lbs	6.2:1	48 in	24.2
SLAIV7500	1545768	330 / 20	440 / 50	9	50 lbs	4.7:1	38 in	28.7
SLAIV8500	1545769	310 / 30	600 / 50	9	50 lbs	4.7:1	42 in	30.7
SLAIV8500HS	1545770	340 / 30	655 / 50	9	50 lbs	5.3:1	50 in	30.7
SLAIV10500	1545771	360 / 40	780 / 65	9	60 lbs	4.2:1	43 in	42.9