


SAFE T ALERT

Replace your CO alarms that are over 5 years old!

Mini Carbon Monoxide Alarm

- Microprocessor technology programmed to detect Carbon Monoxide levels using Time Weighted Average (TWA) at 10% COHb curves.
- No False Alarms from new boat smell or outgassing.
- Full 5 year service life. End of Life clock starts when power is applied, not in inventory or on retail shelves.
- No nuisance alarms caused by temporary background levels of CO.
- Alarm Mute button silences alarm while boat is ventilated.
- Low Current Draw. Innovative micro current circuit saves precious battery power. 37 milliamp (.037 amp.) current draw.
- 62-541-R-Marine and 62-542-R-Marine include normally closed relay. Use to turn on exhaust fans, remote horns/lights/signals or connect to alarm systems.
- Listed NMMA Component. Meets ABYC A-24, Marine CO Alarm.
- Listed to UL 2034 Carbon Monoxide Alarms Marine Use.
- Meets ISO: 12133 Small craft Carbon Monoxide (CO) detection systems.

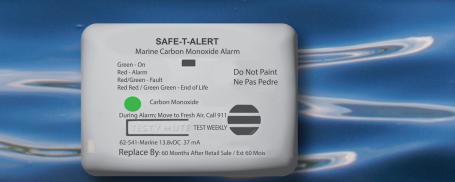

62-541-Marine Surface Mount Models: 62-541-Marine-WT (White) 62-541-R-Marine-WT (White) CASE DIMENSIONS: 3.5" W x 2.5" H x 1.5" D SAFE-T-ALERT™

Marine Carbon Monoxide Alarm

Green - On
Red - Alarm
Do Not Paint
Ne Pas Pedre
Red / Green - Fault
Red / Green Green - End of Life
CO

TEST WEEKLY
During Alarm; Move to Fresh Air, Call 911
62-542-Marine 13.8 w C 37 mA
Replace By: 60 Months After Retail Sale / Est 60 Mois

62-542-Marine Flush Mount Models: 62-542-Marine-WT (White) 62-542-R-Marine-WT (White) CASE DIMENSIONS: 4.5" W x 3.25" H x 1.25" D