

880mA @ 12VDC
440mA @ 24VDC




PRINT TO SCALE!

Capri2 - Dual Color Flush Mount Cockpit Flood Light

Mounting Template

Product Outline

Position and tape template at desired mounting location.

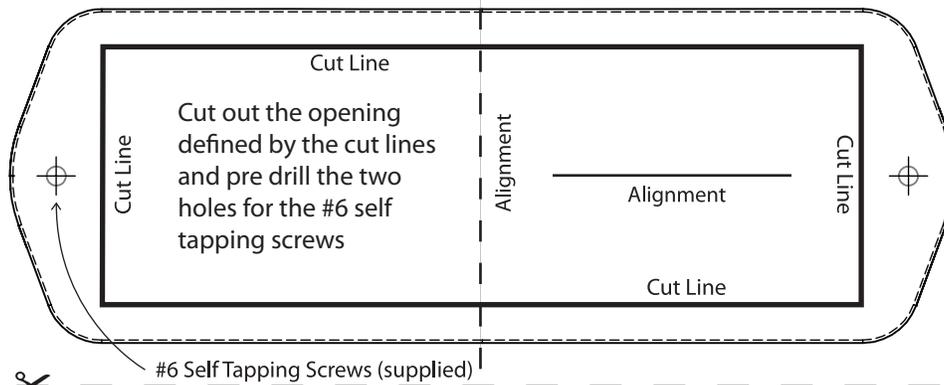

#6 Self Tapping Screws (supplied)

Lumitec Flush Mount Cockpit Flood Lights should be installed by qualified persons only. Lumitec's new DeckSweep Optical System produces a very wide, even, rectangular pattern. The pattern leverages the orientation of the installed light in relation to the targeted surfaces (deck) to maximize light utility.

Light circuits should be protected with an appropriately sized fuse. Each light draws approximately 880mA at 12VDC and 440mA at 24VDC. Fuses on circuits with multiple lights should be sized accordingly.

Lights may get warm or hot to the touch during operation. This is normal and will not cause damage to typical mounting surfaces, including fiberglass and wood. The lights should NOT be mounted on highly flammable substrates or mounting surfaces which are particularly sensitive to high temperatures.

Lights are protected by an over-temperature circuitry. In the unlikely event that the lights turn off due to overheating, the lights will automatically 'reset' and turn back on once the light has again reached a normal operating temperature. Lumitec Flush Mount Cockpit Flood Lights operate best when there is some airflow across the back surface of the lights. Avoid mounting the lights in areas where there is not at least 1" clearance between the sides and back of the light and any other object.

Functionality: **2-COLOR OPERATION WITH DIMMING!**

Note that the light ramps in intensity over a period of about 3 seconds on startup. With no interruption of this ramp the light will achieve and maintain full intensity. To enable a "dimmed mode" simply interrupt the ramp in intensity with a brief off/on toggle of the power. This allows the intensity to be set anywhere from a soft glow to full power. A subsequent off/on toggle will allow the light to change colors.

Limited Warranty

Lumitec is not responsible for product failure caused by abuse, neglect, improper installation, or failure in applications other than those for which it was designed, intended, and marketed.

This product is warranted to be free from defects in workmanship and materials for a period of one year from the date of original purchase. Should your Lumitec product prove defective during the warranty period promptly notify Lumitec and return product with freight prepaid. Lumitec will, at its option, repair or replace the product without charge for parts or labor, or refund purchase price. Products repaired or replaced under this warranty shall be warranted for the unexpired portion of the warranty applying to the original product(s). Lumitec is not responsible for product failure caused by abuse, neglect, improper installation, or failure in applications other than those for which it was designed, intended, and marketed. No warranty or affirmation of fact, express or implied, other than as set forth in the limited warranty statement above is made or authorized by Lumitec. Any liability for consequential and incidental damages is expressly disclaimed. Lumitec liability in all events is limited to, and shall not exceed, the purchase price paid.

Lumitec, Inc.
1405 Poinsettia Drive, Suite 10
Delray Beach, FL 33444
www.lumiteclighting.com

part # 964014-01