

# attwood®

## Two-Position Pull Switch 7563

### Installation Instructions

Attwood marine hardware, navigational lighting, bilge pumps, and other marine accessories are specified more than any other brand by America's best-known boat manufacturers as original equipment. Look to Attwood for quality replacement parts and marine accessories.

### SAVE THESE INSTRUCTIONS

Form Number 69308 Rev. A

03-10

### REQUIRED FOR INSTALLATION

- Drill with  $\frac{3}{8}$ " (10mm) dia. bit.
- Slotted screwdriver.
- Pliers.


### APPLICATION

- Install switch in dashboards or panels up to 1" (25mm) thick.
- Switch requires  $1\frac{1}{4}$ " (31mm) depth behind panel.
- Rated load is 20 amps.

### MOUNTING INSTRUCTIONS

1. Bring power source wire and switched wire to panel. Attach wires to terminal screws.
2. Remove chrome handle and nut from shaft.
3. In desired location, drill  $\frac{3}{8}$ " (10mm) dia. hole through panel. From inside panel, insert shaft through hole.
4. Tighten chrome nut and handle onto end of shaft. From inside, tighten brass nut and washer against panel.

Figure 1

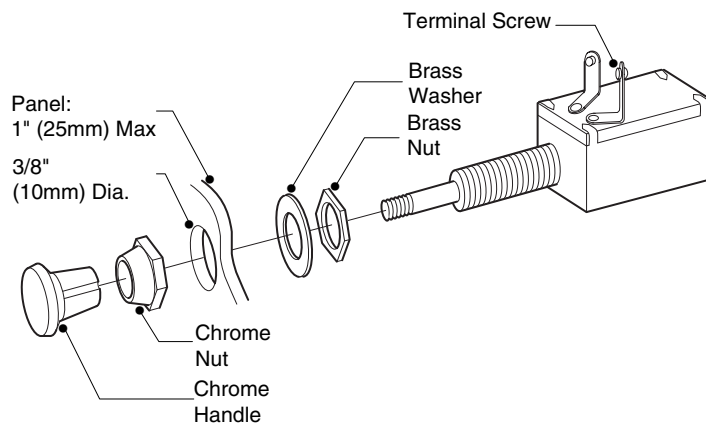

© 2003 Attwood Corporation

1016 N. Monroe Street, Lowell, MI 49331-0260 [www.attwoodmarine.com](http://www.attwoodmarine.com)