


ROKK Wireless Sub (SC-CW-07E)

Parts List

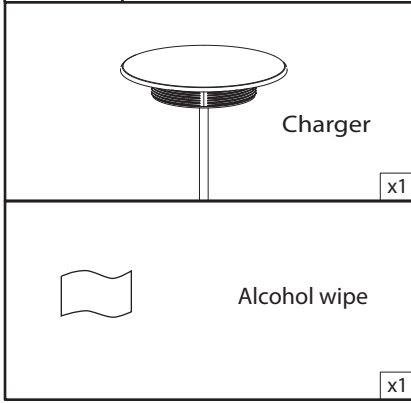

Technical Information

Input voltage range : 10-30V DC (12/24V system)  
 Input current max: 1.5A  
 Output power: 5W (5V, 1A)  
 Standby current draw: < 0.03W  
 Certifications: Qi, CE, FCC, ROHS  
 Waterproof rating: IPX6 front and back

Tools Required

	Power drill
	64/65mm (2.5") Hole Saw
	OR
	Straight router

READ THE IMPORTANT SAFETY INFORMATION LEAFLET BEFORE INSTALLING

**1** Install options and cut out dimensions

**2** Remove self-adhesive backing

Optional threaded locking ring available seperately if self-adhesive is not suitable for mounting surface.  
 Part #: SC-CW-LOCK-01

**3** Use alcohol wipe to ensure surface is free from dirt or grease and insert into hole.

**4** Overlay your choice of non-metallic surface, including wood, fabric or marine traction surface. (Not provided). Maximum thickness ≤3mm. Ensure charge logo is concentric over charger.

**5** Connect wires to 12-24V supply, ensuring a waterproof connection. Fuse appropriately according to input voltage and current, check product is functioning correctly.