
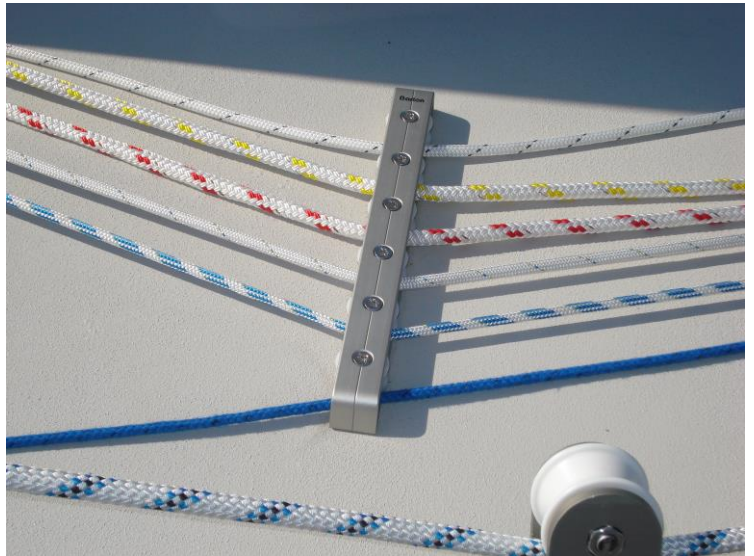


Installation Guide – Barton Deck Organizers

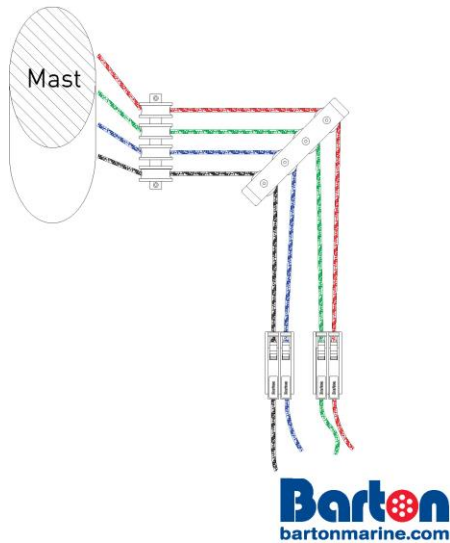

We recommend a trial fit to determine the best position for your deck organizer, typically the unit will bisect the angle of deflection from mast base to cockpit. Check that you can remove the headlining below and will have access to the fixing bolts.

The angle of deflection vertically should not exceed 10 degrees and lines should not touch the aluminum casing.

5 sizes of organizer are available with each of the two model sizes:

Size 1 – 1 ¼" (32mm) diameter sheaves for lines up to 7/16" (12mm)

Size 2 – 1 15/16" (44mm) diameter sheaves for lines up to 9/16" (14mm)

Organizers can be double stacked with a lesser number of sheaves on top and stacked towards the center line to prevent snagging of sheets to the outside.

Mark and drill holes using a 1/4" (6.4mm) drill bit for the Size 1 organizer M6 countersunk fixing bolts and 11/32" (8.5mm) for the Size 2 organizer M8 countersunk fixing bolts. Make sure to use large penny washers under the deck (not provided) and use a quality waterproof sealant on each countersunk fixing bolt (not provided) and into each hole to prevent water ingress. Fit fixing bolts through each sheave in order to evenly spread the load.

The highest loaded lines should be fitted to the lowest organizer, if double stacking, and to the inside sheave closest to the centre line.

Flush through on a regular basis with fresh water, do not use oil or grease to lubricate and this will accelerate wear.

For technical advice, contact sales@bartonmarine.com