



SWIFT. SILENT. SECURE.

# UNIVERSAL ALUMINUM BRACKET INSTRUCTIONS


**NOTE:** This adapter bracket can be mounted on either port or starboard.

## Hardware

- A.** (1) Adapter plate
- B.** (1) Brace
- C.** (1) Backer plate
- D.** (4) 4 & 1/4" x 1/2" Transom bolts
- E.** (4) 1/2" Lock nuts
- F.** (8) 1/2" Heavy thunder washers
- G.** (4) 3/8" x 2" Power-Pole anchor bolts
- H.** (4) 3/8" Neo-bond washer
- I.** (4) 3/8" Heavy thunder washer
- J.** (4) 3/8" Lock nuts
- K.** (4) 5/16" x 1 & 3/4" Micro anchor bolts
- L.** (4) 5/16" Heavy thunder washer
- M.** (4) 5/16" Lock nuts

## Installation Tools:

- 9/16" & 3/4" Socket with ratchet
- 9/16" & 3/4" Wrench
- 1/2" Steel drill bit with drill
- 1/4" Allen wrench (Micro install only)
- 1/2" Socket with ratchet (Micro install only)
- 1/2" Wrench (Micro install only)
- Pencil

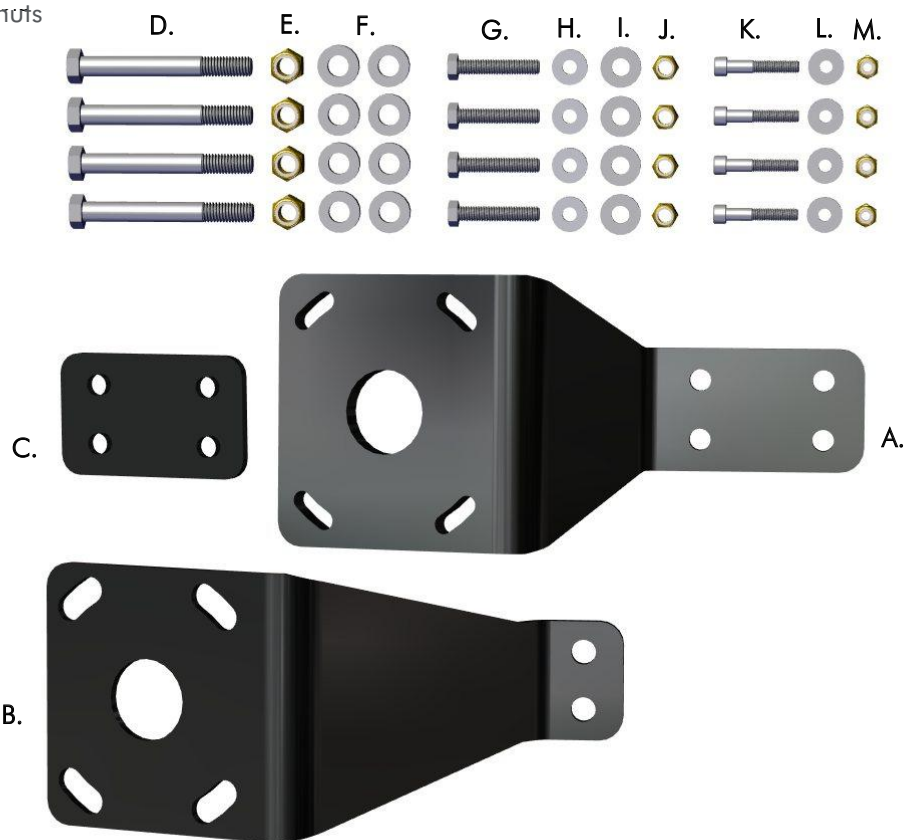

# ALUMINUM BOAT ADAPTER PLATE

## Installation Instructions:

**STEP 1.** Place bracket (A) up against the outer lip of rub rail as illustrated and mark the hole locations. **FIG. 1**

**STEP 2.** Drill the marked hole locations with a 1/2" steel drill bit.

**STEP 3.** Place heavy thunder washers (F) onto bolts (D).

**STEP 4.** With adapter plate (A) in position install two transom bracket bolts (D). **FIG. 1 Section 1.1**

**STEP 5.** Place backer plate (C) onto transom bolts (D) followed by a thunder washer (F) and thread lock nut (E) onto each bolt and tighten. **FIG. 1 Section 1.2**

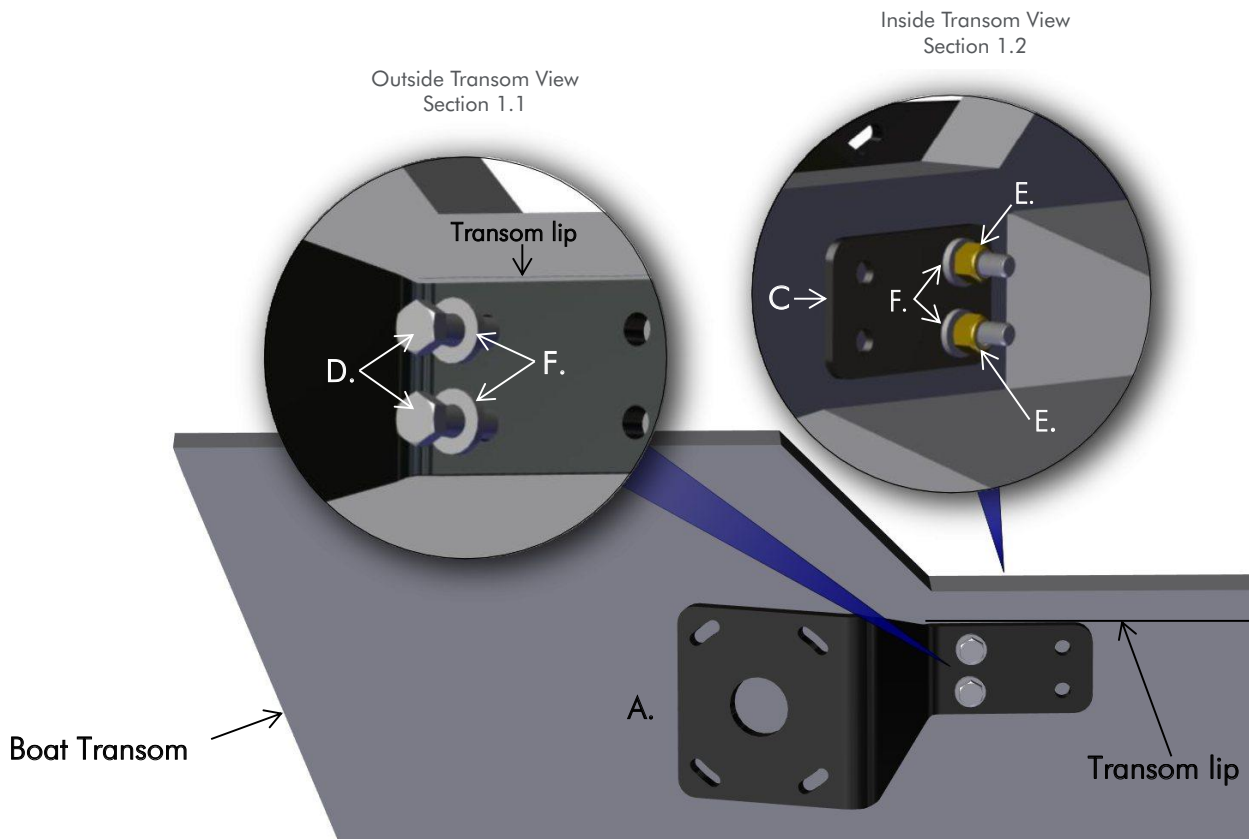


Figure 1

# ALUMINUM BOAT ADAPTER PLATE

**STEP 6.** Place brace (B) on top of adapter plate (A) aligning holes and push the two remaining transom bolts (D) through brace (B), adapter plate (A) and backer plate (C). **FIG. 2 Sections 2.1 & 2.2**

**STEP 7.** Place thunder washer (F) onto remaining bolts (D) and thread lock nuts (E) on and tighten. **FIG. 2 Section 2.2**



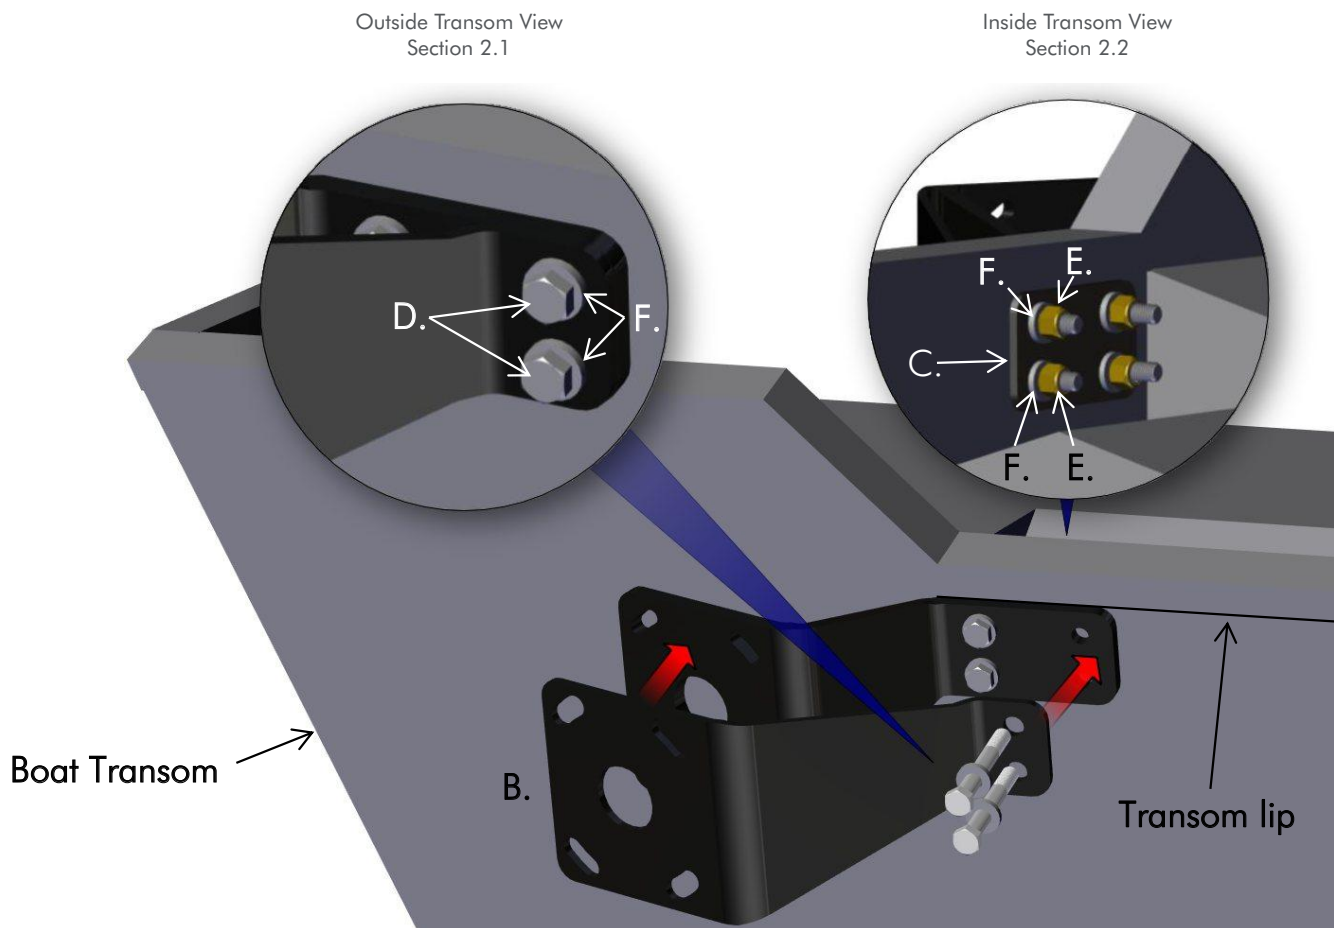


Figure 2

# ALUMINUM BOAT ADAPTER PLATE

**STEP 8.** Install the bolts and hardware as illustrated for your Power-Pole or Micro anchor and tighten.

**FIG. 3 & 4**

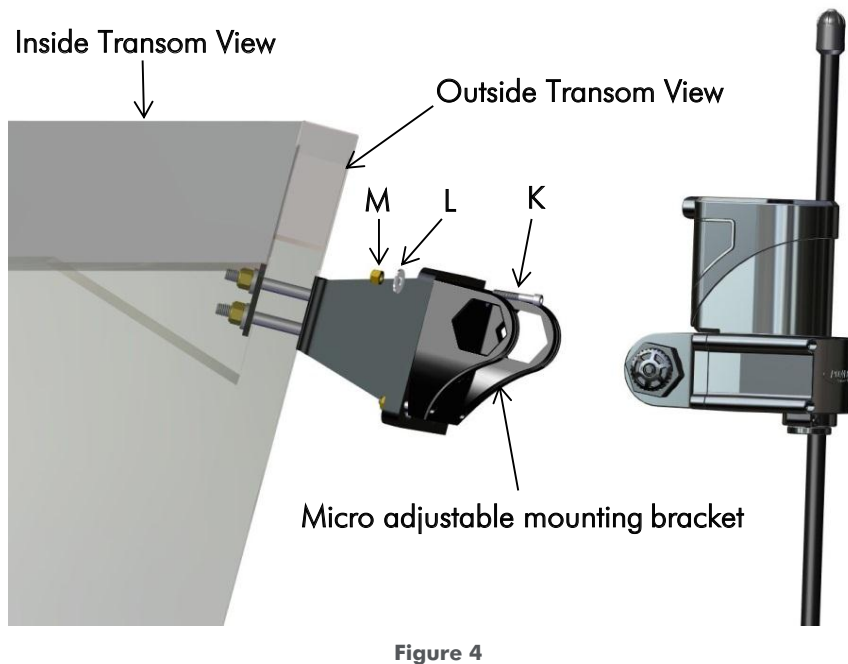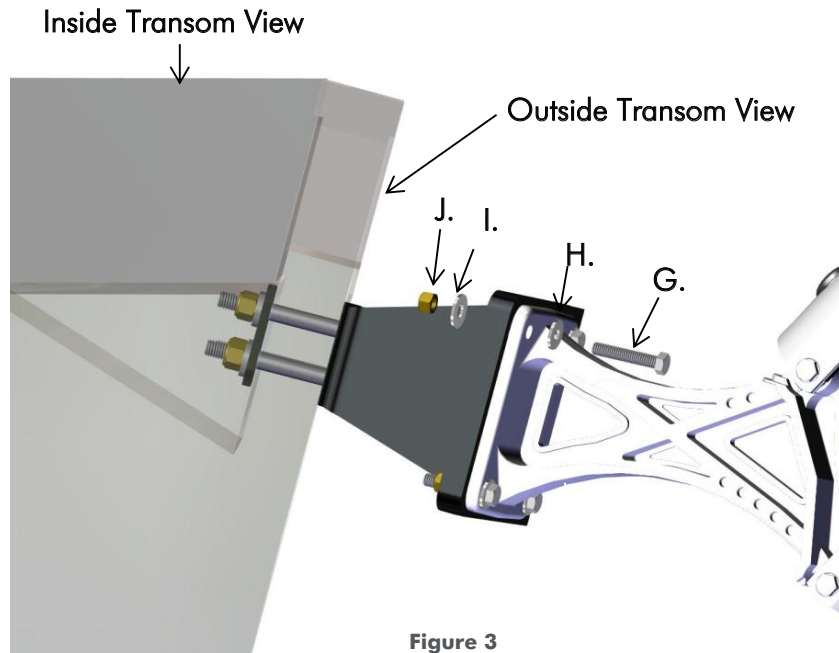

Need help? Contact our Technical Support Team at **1 + 813.689.9932 Option 2**