



SWIFT. SILENT. SECURE.

MICRO® ANCHOR BOW MOUNT BRACKET - LONG INSTRUCTIONS


NOTE: For mounting Micro Anchor in combination with a bow mounted trolling motor. Mounts between the trolling motor base and boat deck.

Installation Tools:

- 1/4" Allen wrench (Not included)
- 1/2" Wrench or 1/2" socket with ratchet

Included hardware:

- A** (1) Micro anchor bow mount bracket
- B** (4) 5/16" Lock nuts
- C** (4) 5/16" Washers
- D** (4) 5/16" Mounting bracket bolts

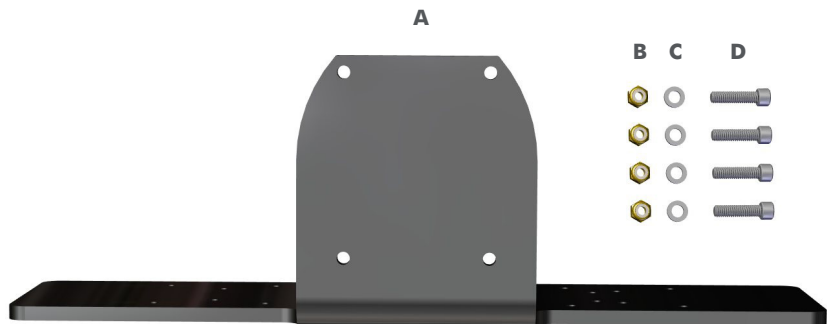

INSTALLATION

STEP 1 Remove the trolling motor according to the manufactures instructions.

STEP 2 Align the holes in the Micro anchor bow mount bracket (A) with the existing bolt holes in the deck of boat.

FIG. 1 Section 1.1

NOTE: The Micro anchor bow mount bracket (A) has many factory drilled holes to accommodate most trolling motor bolt patterns and quick release mounts. Drill holes as needed.

Step 3 Place the trolling motor on top of the Micro anchor bow mount bracket (A) and reinstall hardware. **FIG. 1**

Step 4 Tighten trolling motor hardware back to the manufactures torque specifications.

Step 5 Attach the Micro bracket to the Micro anchor bow mount bracket (A) as illustrated. **FIG. 1** Section 1.2

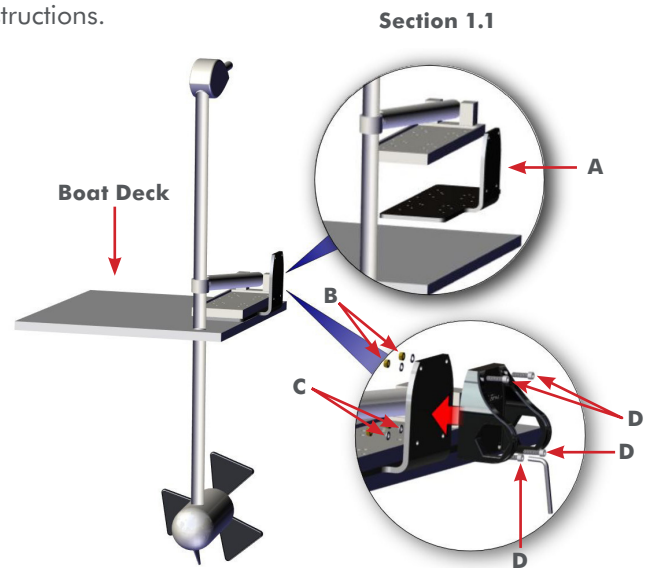


Figure 1

Section 1.2

Hardware missing? Need help? Contact our Technical Support Team at **1 + 813.689.9932 Option 2**

