


RAM TOUGH-HUB INSTRUCTIONS

Parts Index

- A. RAM TOUGH-HUB (QTY. 1)
- B. BARE WIRE POWER CABLE (QTY. 1)
- C. IGNITION TRIGGER WIRE (QTY. 1)
- D. USB CABLE (QTY. 1)
- E. USB PORT FRAME (QTY. 1)
- F. FOAM STRIP FOR USB FRAME (QTY. 1)
- G. 1/4" SCREW FOR USB FRAME (QTY. 2, + 2 EXTRA)

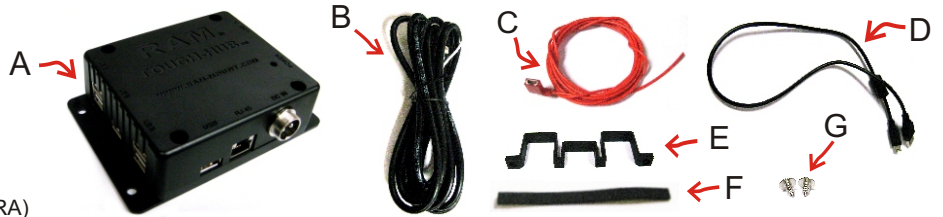

-5 QTY. USB PORTS




-ADDITIONAL USB PORT
-RJ 45 ETHERNET PORT
-12-48 VOLT DC INPUT



-IGNITION TRIGGER
-USB OUTPUT PORT

IGNITION TRIGGER CAN BE WIRED TO THE IGNITION OF THE VEHICLE (OR OTHER 12V IGNITION SOURCE) TO PROVIDE A TIMED DISCONNECT TO THE CONNECTED PERIPHERALS AFTER VEHICLE HAS BEEN TURNED OFF. WHEN VEHICLE IGNITION IS OFF, TOUGH-HUB CONTINUES TO PROVIDE POWER TO THE CONNECTED PERIPHERALS FOR A PRE SET DURATION OF TIME. THE DEFAULT DELAY IS PRE SET FROM THE FACTORY TO 15 MINUTES.




TO CHANGE DEFAULT PRE SET, REMOVE HOUSING AND SWITCH THE SMALL JUMPER COMPONENT FROM "POS 2" TO ANY OF THE OTHER 3 POSITIONS:

- POS 0 - CONSTANT ON (IGNITION TRIGGER REQUIRED)
 - POS 1 - TIME DELAY FOR 5 MINUTES
 - POS 2 - TIME DELAY FOR 15 MINUTES
 - POS 3 - TIME DELAY FOR 45 MINUTES
- BLUE LED LIGHT BLINKS DURING TIME DELAY**



1. USE (F) FOAM STRIP TO ADHERE UNDER (E) USB PORT FRAME.
 2. POSITION (E) USB PORT FRAME IN FRONT OF THE 5 USB PORTS.
 3. SECURE TO HUB USING (G) SCREWS.
- ONLY RECOMMENDED FOR USB PORTS THAT DO NOT FREQUENTLY CONNECT AND DISCONNECT**

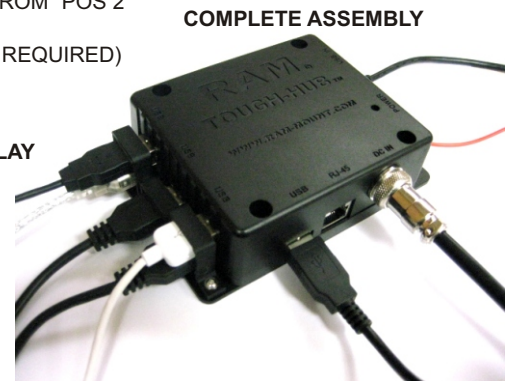


COMPLETE ASSEMBLY

RMR-INS-HUB1

RAM TOUGH-HUB INSTRUCTIONS

Parts Index

- A. RAM TOUGH-HUB (QTY. 1)
- B. BARE WIRE POWER CABLE (QTY. 1)
- C. IGNITION TRIGGER WIRE (QTY. 1)
- D. USB CABLE (QTY. 1)
- E. USB PORT FRAME (QTY. 1)
- F. FOAM STRIP FOR USB FRAME (QTY. 1)
- G. 1/4" SCREW FOR USB FRAME (QTY. 2, + 2 EXTRA)

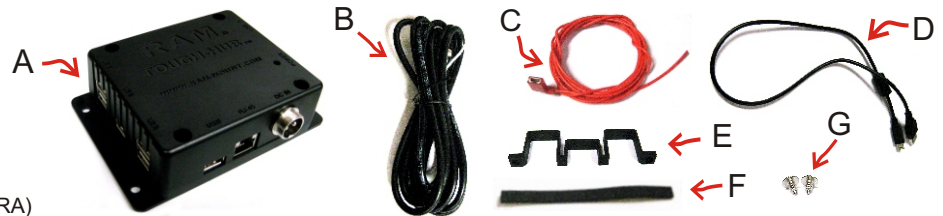

-5 QTY. USB PORTS




-ADDITIONAL USB PORT
-RJ 45 ETHERNET PORT
-12-48 VOLT DC INPUT



-IGNITION TRIGGER
-USB OUTPUT PORT

IGNITION TRIGGER CAN BE WIRED TO THE IGNITION OF THE VEHICLE (OR OTHER 12V IGNITION SOURCE) TO PROVIDE A TIMED DISCONNECT TO THE CONNECTED PERIPHERALS AFTER VEHICLE HAS BEEN TURNED OFF. WHEN VEHICLE IGNITION IS OFF, TOUGH-HUB CONTINUES TO PROVIDE POWER TO THE CONNECTED PERIPHERALS FOR A PRE SET DURATION OF TIME. THE DEFAULT DELAY IS PRE SET FROM THE FACTORY TO 15 MINUTES.




TO CHANGE DEFAULT PRE SET, REMOVE HOUSING AND SWITCH THE SMALL JUMPER COMPONENT FROM "POS 2" TO ANY OF THE OTHER 3 POSITIONS:

- POS 0 - CONSTANT ON (IGNITION TRIGGER REQUIRED)
 - POS 1 - TIME DELAY FOR 5 MINUTES
 - POS 2 - TIME DELAY FOR 15 MINUTES
 - POS 3 - TIME DELAY FOR 45 MINUTES
- BLUE LED LIGHT BLINKS DURING TIME DELAY**



1. USE (F) FOAM STRIP TO ADHERE UNDER (E) USB PORT FRAME.
 2. POSITION (E) USB PORT FRAME IN FRONT OF THE 5 USB PORTS.
 3. SECURE TO HUB USING (G) SCREWS.
- ONLY RECOMMENDED FOR USB PORTS THAT DO NOT FREQUENTLY CONNECT AND DISCONNECT**

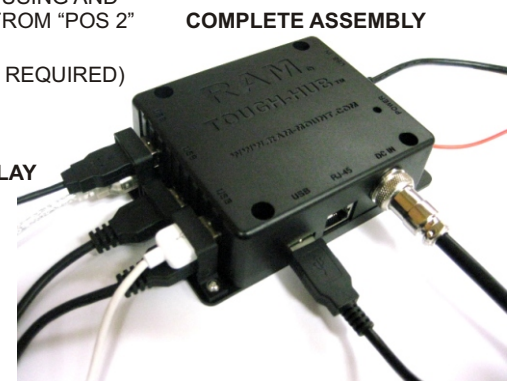

COMPLETE ASSEMBLY

RMR-INS-HUB1