

DOCK EDGE INC. Dock Wheels Instruction Sheet

9" (95-078-F) & 12" (95-072) Wheels

IMPORTANT:

DO NOT assemble wheel to mounting bracket before attaching the mounting bracket to the dock.

Suggested Materials:

- (6) 5/16" x 1 1/2" long lag bolts and flat washers and wrench to fit
- 1/8" Drill Bit
- 3/4" Wrench
- 2 oz. Waterproof Grease

Installation Instructions:

1. Hold mounting bracket on dock in desired location.
2. Drill 1/8" holes in dock through mounting bracket holes.
3. Screw in lag bolts.
4. Liberally apply grease to mounting bracket post.
5. Place dock wheel over post, using bolt and washers.
6. Tighten bolt securely.
7. Press white cap on wheel hub. Cap will slide on more easily if soaked first in warm water for a few minutes.
8. Inflate to desired firmness. (Do not exceed 3 psi.)

24" Dock Wheel (95-074-F & 95-076-F) & 18" (95-077-F)

IMPORTANT:

DO NOT assemble wheel to mounting bracket before attaching the mounting bracket to the dock.


Suggested Materials:

- (6) 3/8" x 3" long lag bolts and flat washers and wrench to fit
- 3/16" Drill Bit
- 3/4" Wrench
- 2 oz. Waterproof Grease

Installation Instructions:

1. Hold the mounting bracket on the dock in the desired location. Drill 3/16" holes in the dock through mounting bracket holes.
2. Screw in lag bolts. Liberally apply grease to the mounting bracket post.
3. Place dock wheel and axle assembly over the mounting bracket post.
4. Place washer over threaded stud.
5. Thread lock nut on to threaded stud and tighten to locking position. (Be careful not to overtighten.)
6. Thread the PVC cap on to threaded coupling.
7. Inflate dock wheel to desired firmness. (Do not exceed 3 psi.)

18" & 24" Bracket Assembly

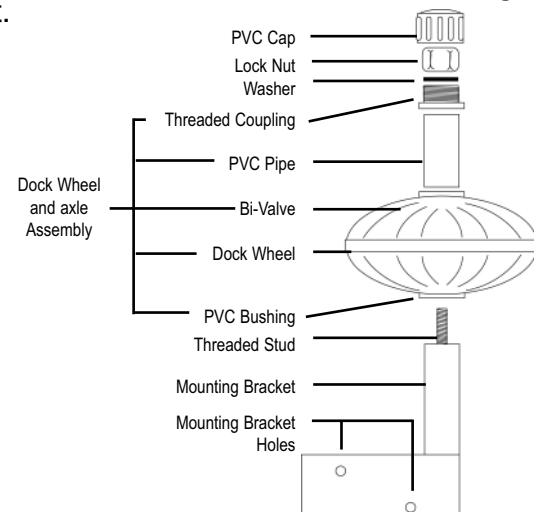

DOCK EDGE  INC.

35 Armthorpe Road
Brampton, Ontario, Canada
L6T 5M4

Phone: (800) 295-3625

www.dockedge.com

Made in Canada

Printed in Canada