




1. Mark two spots with the distance of $1\frac{3}{4}$ inches between, drill two holes with diameter of $1\frac{13}{16}$ inches using the two spots as central points.



2. Mounting with plate

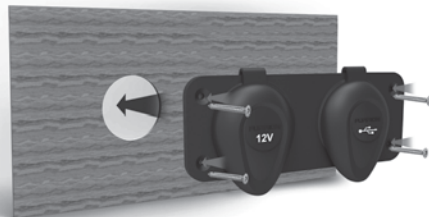


3. Screw nut securely on rear

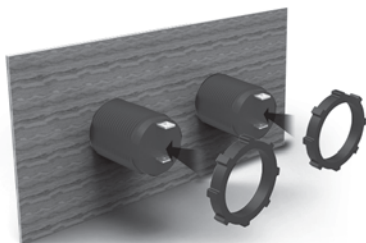

4. Connect wires

- + Positive Red
- Negative Black

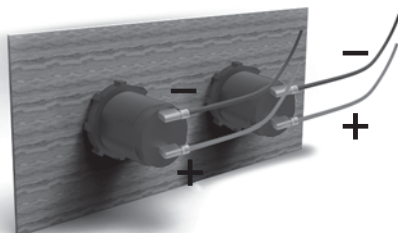

- 5.

