



EN6SLIM/WH • EN6SLIM/BK SPEAKER ENCLOSURE

PAIR: LEFT & RIGHT

- ▶ HIGH DENSITY PLASTIC
- ▶ INPUT CABLE INCLUDED
- ▶ COLOR INJECTION MOLDING
- ▶ UNIVERSAL APPLICATIONS
- ▶ WATERPROOF IP65

NXL-6SL | 2-WAY SLIM SPEAKER WITH ENCLOSURE AND RGB LIGHTS INCLUDED


Specifications:

Nominal Diameter	6.5"
Nominal Impedance	4 ohms
Maximum Power Handling	100W
RMS Power Handling	25W
Sensitivity (1w/1m)	90dB
Frequency Response	90-20 KHz
Recommended Hi Pass Crossover	100 Hz

Motor:

Voice Coil Diameter	1"/25.5 mm
Voice Coil Former Material	Aluminium
Winding Material	Copper
Cone Material	PPI
Surround Material	Rubber
Basket Material	ABS
Magnet Material	Ferrite
Magnet Weight	5.3oz
Displacement Volume	0.2246L

DIMENSIONS

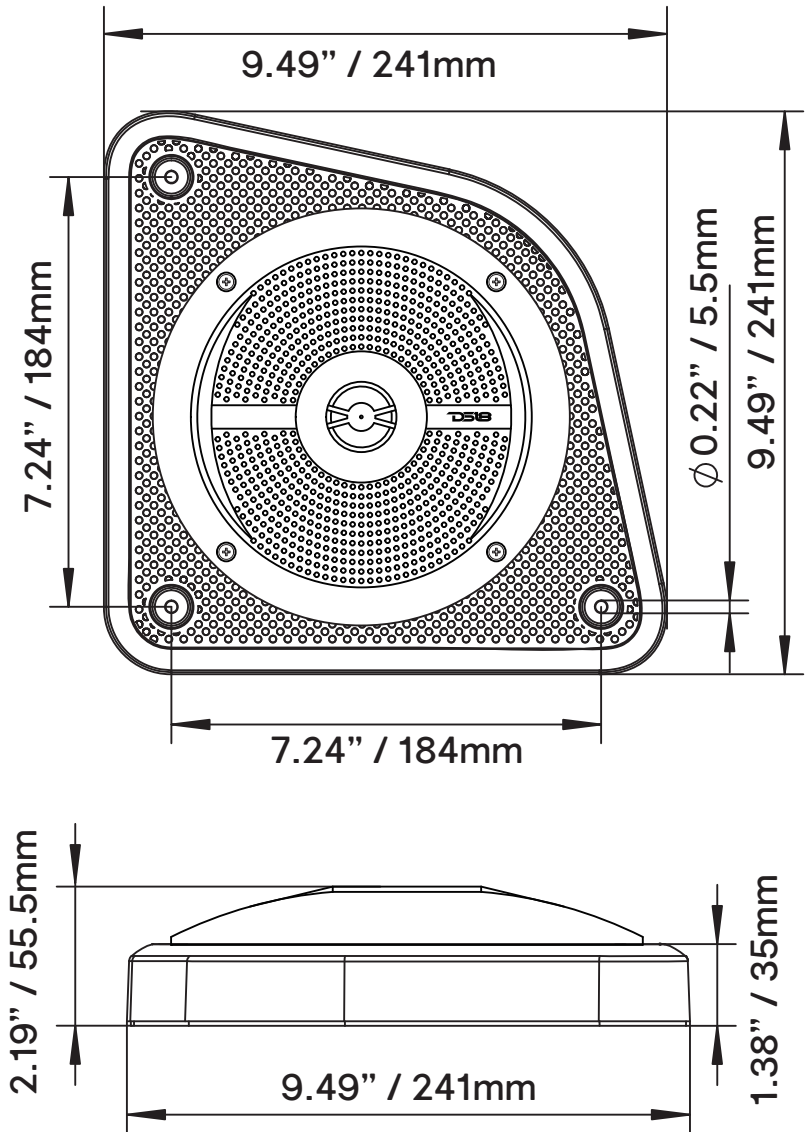

DS18.COM



COMPATIBLE WITH THE DS18 LED-BTC OR FOR MULTI-FUNCTION RGB LED LIGHTING. (SOLD SEPARATELY)

