




# TRIDENT MARINE®

## EXTRA-FLEX CORRUGATED MARINE WET EXHAUST (SAE J2006 & LLOYD'S)

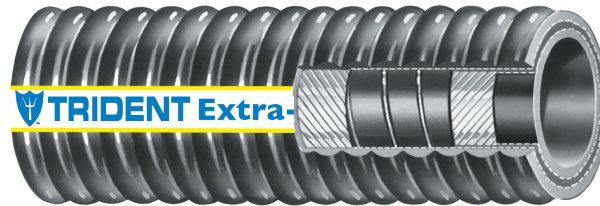

### 252F Series

**Trident Extra-Flex** Corrugated Wet Exhaust and Water Marine Hose offers the best performance with an incredible bend radius and high-temperature EPDM Rubber compounds. This enables it to handle higher temperatures while providing longer life and durability than its competition. It exceeds SAE J2006-R2, ABYC, and NMMA P-1 exhaust standards and is Lloyd's Registry Type Approved. Black High Temp EDPM Rubber 250°F (121°C) Max. continuous.

Specifications	Part Number	ID		OD		Working Pressure		Weight		Bend Radius	
		in.	mm.	in.	mm.	Psi	Bar	Lbs/Ft	Kg/M	in	mm
<b>Construction:</b>	repl. "x" with # for length										
<b>Tube &amp; Cover:</b> High Temp EPDM Rubber	252F-112x	1-1/2	38.0	1.97	50.0	75	5	0.5	0.74	2.25	57.1
	252F-158x	1-5/8	42.0	2.05	52.0	75	5	0.53	0.79	2.43	61.7
	252F-134x	1-3/4	44.5	2.24	57.0	75	5	0.59	0.88	2.62	66.5
<b>Color:</b> Black	252F-178x	1-7/8	48.0	2.36	60.0	75	5	0.63	0.94	2.81	71.4
	252F-200x	2	50.8	2.48	63.0	75	5	0.67	1	3.0	76.2
<b>Reinforcement:</b> Multi-ply, High Tensile Synthetic, Steel Helix	252F-238x	2-3/8	60.0	2.87	73.0	75	5	0.81	1.2	3.6	91.4
	252F-212x	2-1/2	63.5	3.07	78.0	75	5	1.21	1.8	3.75	95.2
	252F-278x	2-7/8	73.0	3.46	88.0	75	5	1.51	2.24	4.3	109.2
	252F-300x	3	76.2	3.62	92.0	75	5	1.82	2.71	4.5	114.3
<b>Temperature Range:</b> -31°F - 250°F (-35°C - 121°C)	252F-318x	3-1/8	80	3.70	94.0	75	5	1.95	2.9	4.62	117.3
	252F-312x	3-1/2	90	4.13	105.0	75	5	2.01	2.99	5.25	133.3
	252F-400x	4	101.6	4.57	116.0	75	5	2.35	3.5	6.0	152.4
	252F-500x	5	127	5.75	146	75	5	2.76	3.98	7.5	190.5
<b>Lengths:</b>	252F-600x	6	152.4	6.77	172.0	75	5	2.96	4.4	9	228.6
6.25' (1.9m) x = 1	252F-800x	8	203	8.86	225.0	75	5	4.57	6.8	12	304.8
12.5' (3.81m) x = 4											
25' (7.62m) x = 5											

eg.(252F-3006 = 50 ft. coil)

\*Burst Pressure is 3 x Working Pressure

**Coils:**  
50' (15.24m) x = 6