

A New Era in DUAL PRO Technology

800 Watt High Frequency Chargers Are Here



ES800-24
ES800-36



- o US Designed and Assembled
- o IP 67 rated
- o CAN Capable
- o FCC 15 Parts A & B compliant
- o Ignition Protected
- o AC universal input (85–270VAC 50/60HZ)
- o Output: 800W— 24VDC@25A, 36VDC@22.2A
- o PROView Link capability with selectable charging algorithms and over the air updates

Model	Total Output	Description	Battery System
ES0800-24V003	25 Amps	Ring Terminals	24V
ES0800-36V003	22 Amps	Ring Terminals	36V

PROView™
LINK

Monitor the condition of your batteries using your mobile device.



www.pcsdv.com



DUAL PRO®
Pro Quality Pro Performance

PRO Charging Systems

032525

Eagle Performance Series HF DIMENSIONAL DRAWINGS

ES800-24
ES800-36

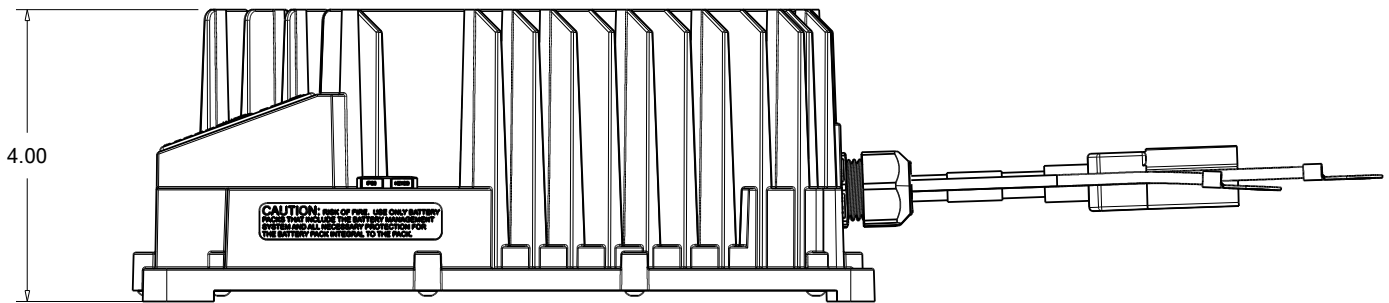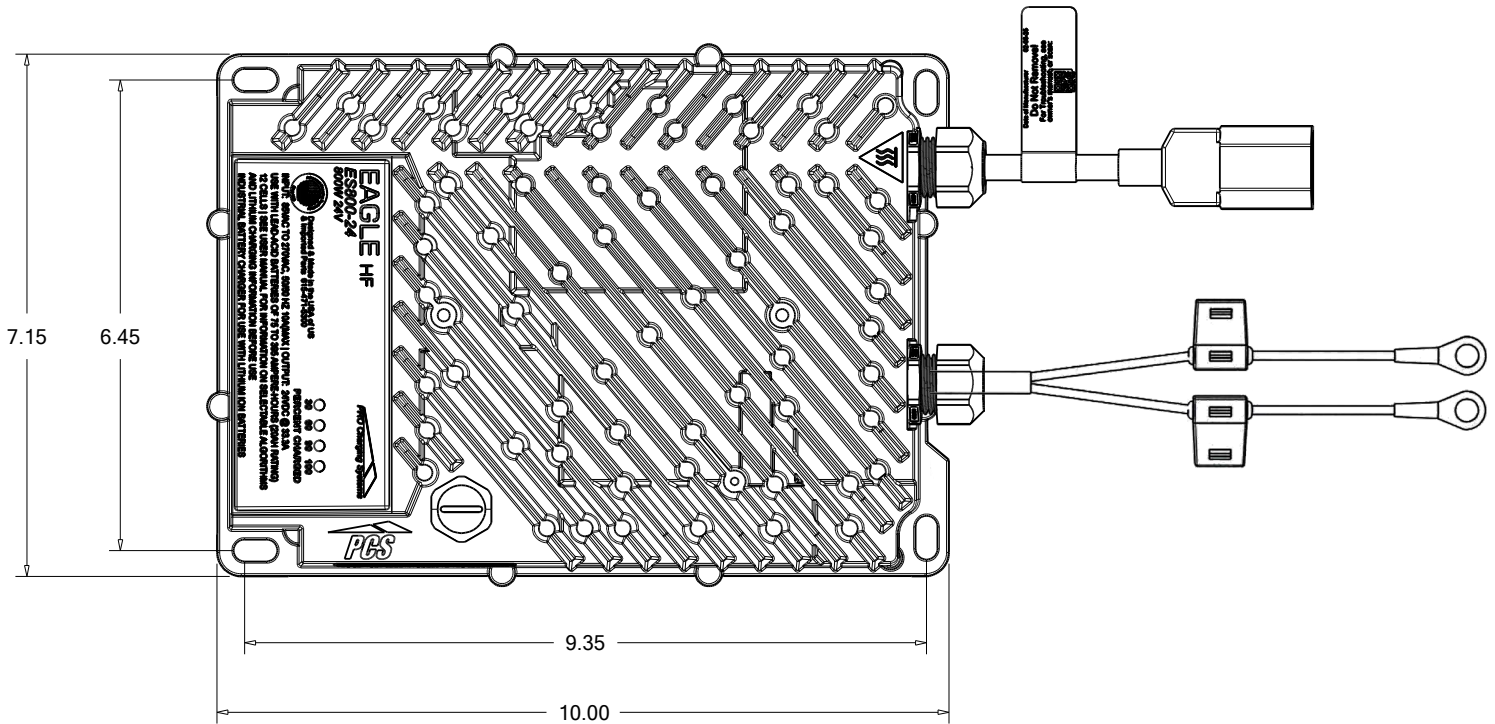

CASE DIMENSIONS: 10" X 7.15" X 4"

WEIGHT: 11 LBS

032525

Exceptional QUALITY, PERFORMANCE, and RELIABILITY.