#### DATA SHEET | 2024








### eclipse

**ECLIPSE Neon Flex - Blue** 

## **SNL100**



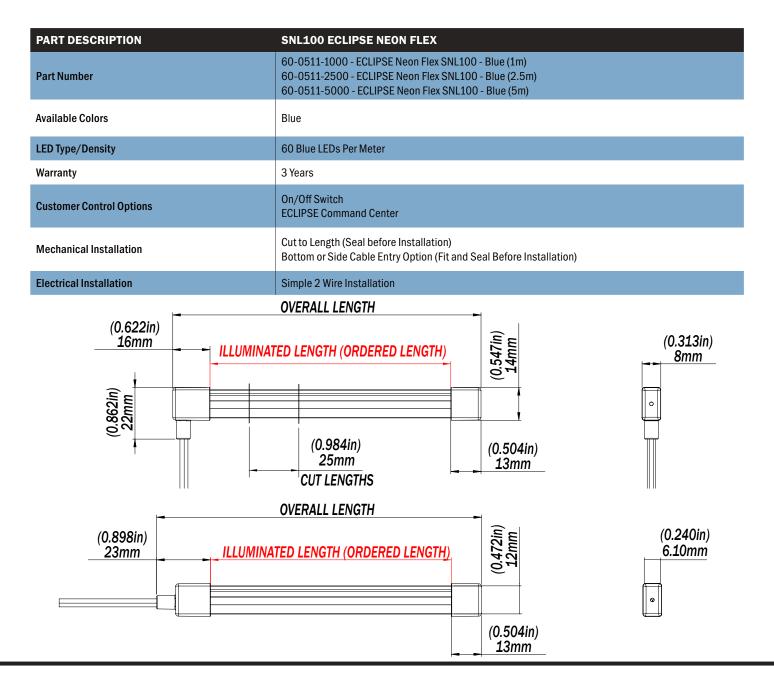

EMEAA: Info@Lumishore.com | USA: Sales@LumishoreUSA.com

Units 11 & 12, Ashmount Business Park, Upper Fforest Way, Swansea, SA6 8QR | 7137 24th Court East, Sarasota, FL 34243, USA

### **DATA SHEET | 2024**



# SNL100

NEON FLEX STRIP LIGHT

TECHNICAL	
Supply Voltage Range	12V DC Only (10 - 15V DC)
Max Current Draw Per Meter (12V DC)	0.5A/m (6W/m)

PHYSICAL	
Ingress Protection	IP68
Illuminated Cross Section	12.0mm x 6.1mm (0.433" x 0.240")
End Cap Dimensions	14.0mm x 8.0mm (0.551" x 0.314")
Lengths Available	1m, 2.5m and 5m 39", 98" and 196" (Cut and Seal)
Construction	Fully Encapsulated and Potted Spot Free Diffuser
Mechanical Installation	Cut to Length and Seal before Install. Cut in 25mm Steps. Stainless Steel Screw Clips for Mounting.
Weight Per M (yd)	86g (3 oz)
UV Resistant	Yes
Salt Spray Tested	Yes
Installation Location	Outdoor / Partially Covered Areas / Indoor





ACCESSORIES	
ECLIPSE Command Center	60-0495
Expansion Module (Single Zone)	60-0496
Expansion Module (Double Zone)	60-0497
Stainless Steel Clips	60-0514

LIGHTING SYSTEM FUNCTIONALITY (ON/OFF SWITCH)	
On/Off Control	Yes
Dimming Control	No

LIGHTING SYSTEM FUNCTIONALITY (ECLIPSE COMMAND CENTER)		
From Smart Device/MFD:		
On/Off Control	Yes	
Dimming Control	Yes	
Zone Control	Yes	
From Momentary Switch (Optional):		
On/Off Control	Yes	
Dimming Control	Yes	

ECLIPSE-SNL100-FLEX-BLUE-05.24