

FUSION®

6.5" MARINE 2-WAY SPEAKERS

MS-FR6520

SPECIFICATIONS


MAX POWER RATING	200 Watts
EFFICIENCY (1W/1M)	90dB
FREQUENCY RESPONSE	80Hz – 20kHz
IMPEDANCE	4 Ohms
MAGNET STRUCTURE	50 Oz
MOUNTING DEPTH	70mm - 2 3/4"
MOUNTING DIAMETER	141mm - 5 9/16"

PRODUCT CONTENTS

2 x 6.5" Marine Speakers
 2 x Speaker Cables
 1 x Mounting Template
 2 x Foam Gaskets
 1 x FUSION Decal
 Mounting Screws & Hardware
 Manual
 Warranty Card

INSTALLATION

- » Check clearance around the mounting area before installation ensuring that the area is free from obstruction and there is adequate depth for the speaker.
- » Using the supplied mounting template, mark the correct diameter on the mounting surface.
- » Use a suitable cutting tool to remove the marked surface and drill four holes for the screws to pass through.
- » Peel the backing off the foam gasket provided and attach to the mounting surface to seal the rear of the marine speaker.
- » Ensure correct polarity before connecting the speaker terminals to the marine audio system using the speaker cable provided.
- » Insert the speaker into the speaker mounting hole and affix the speaker with the stainless screws and mounting hardware provided.

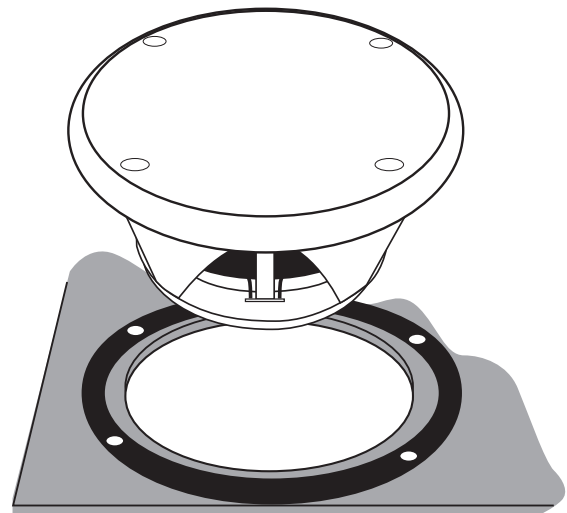

RECORD YOUR PURCHASE DETAILS HERE:

SERIAL NUMBER

DATE OF PURCHASE

AFFIX RECEIPT HERE

CAUTION: Speakers can cause interference to navigational equipment. Please refer to navigation equipment manufacturer for speaker mounting restrictions.
WARNING! Audio Systems can produce sound levels over 135dB. Continuous exposure to sound pressure levels over 100dB may cause permanent hearing loss!

.....
www.fusionelectronics.com



PUBLISHED BY FUSION ELECTRONICS LIMITED: © Copyright 2010 by FUSION Electronics Limited. All rights reserved. Specifications and design are subject to change without notice.
 YOU CAN HELP PROTECT THE ENVIRONMENT! Please remember to respect the local regulations: Hand in the non-working electrical equipment to an appropriate waste disposal center.