

DA Microfiber Correction System

Meguiars DA Microfiber Correction System is a two-step process designed to correct paint without leaving any swirls - guaranteed!
Always clay the car before beginning the process below.

SEVERE TO MODERATE

Swirls Acid Rain Water Spots - Bird Droppings Severe to Moderate Scratches



STEP 1. Paint Correction

You Need: D300 DMX Disc

- Prime DMX Xtra Cut Disc with a uniform application of D300.
- Set DA Polisher to **4800 OPM**. Working in a 2'x2' section, apply 2-3 moderate pressure passes followed with 2-3 light pressure passes.
- Wipe off residue using a Meguiar's Ultimate Wipe Detailing Cloth.




**If DA Haze occurs follow process with D302 before Step 2*

STEP 2. Paint Finishing & Wax Protection

You Need: D301 DMF Disc

- Prime DMF Finishing Disc with a uniform application of D301.
- Set DA Polisher to **3800 OPM**. Work surface, applying 2-3 light pressure passes.
- Wipe off residue using a Meguiar's Ultimate Wipe Detailing Cloth.

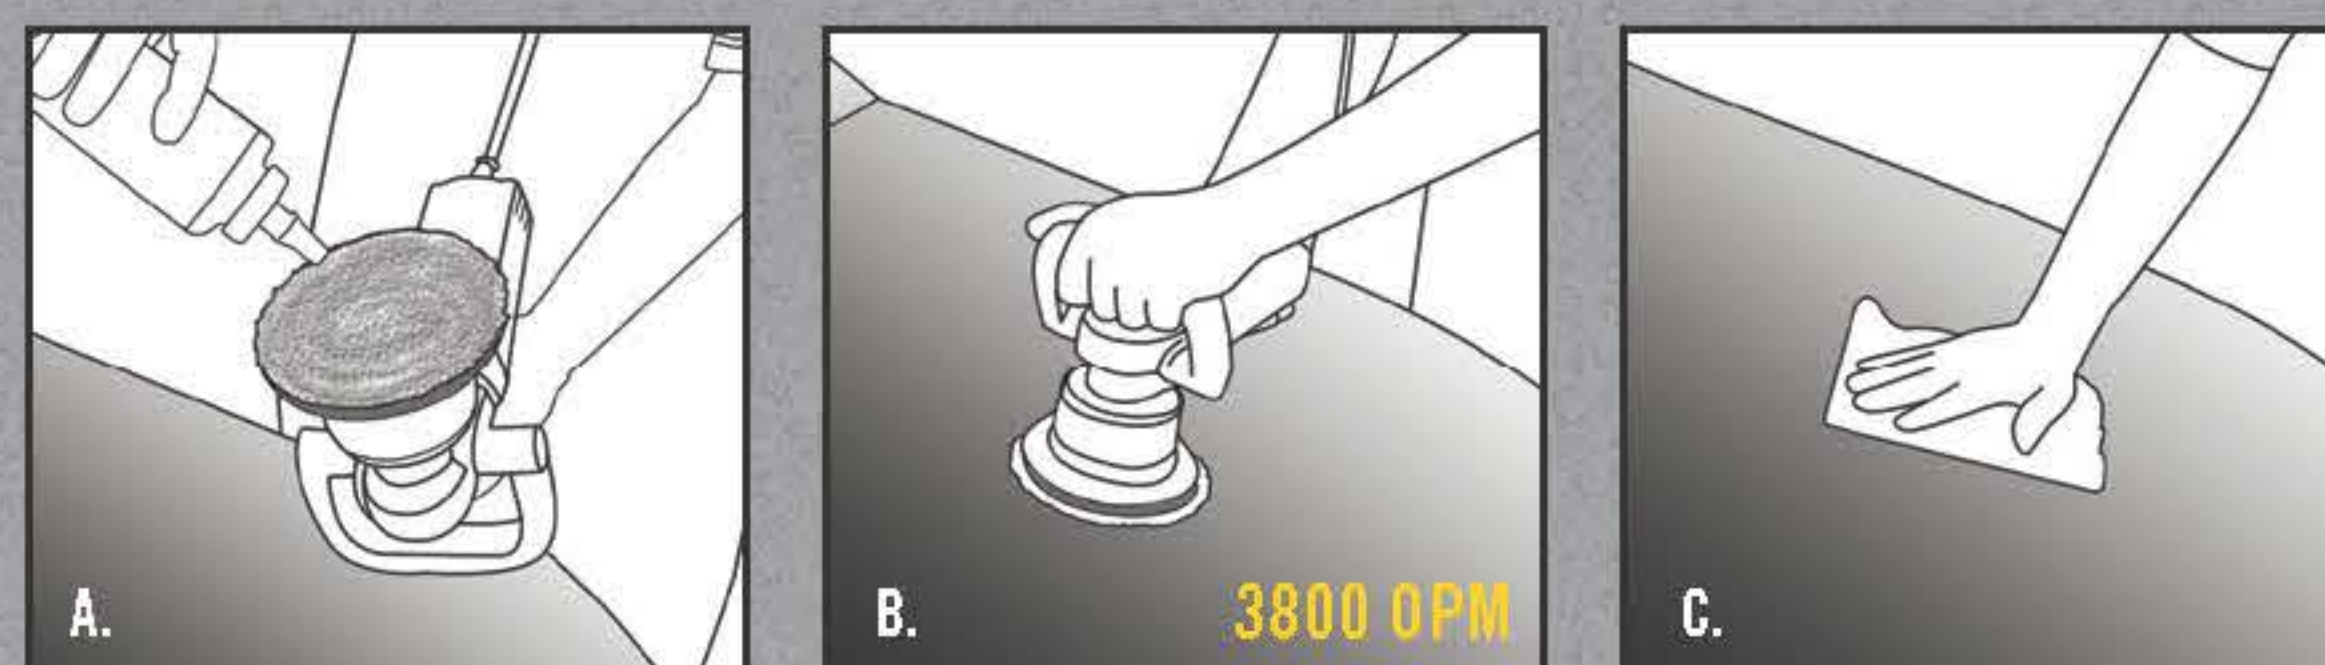

FOR MORE INFORMATION:

Go to meguiars.com or call our customer care center at 1-800-347-5700

MODERATE TO LIGHT


Swirls Acid Rain Water Spots - Bird Droppings Moderate to Light Scratches



STEP 1. Paint Correction

You Need: D300 DMC Disc

- Prime DMC Cutting Disc with a uniform application of D300.
- Set DA Polisher to **4800 OPM**. Working in a 2'x2' section, apply 2-3 moderate pressure passes followed with 2-3 light pressure passes.
- Wipe off residue using a Meguiar's Ultimate Wipe Detailing Cloth.

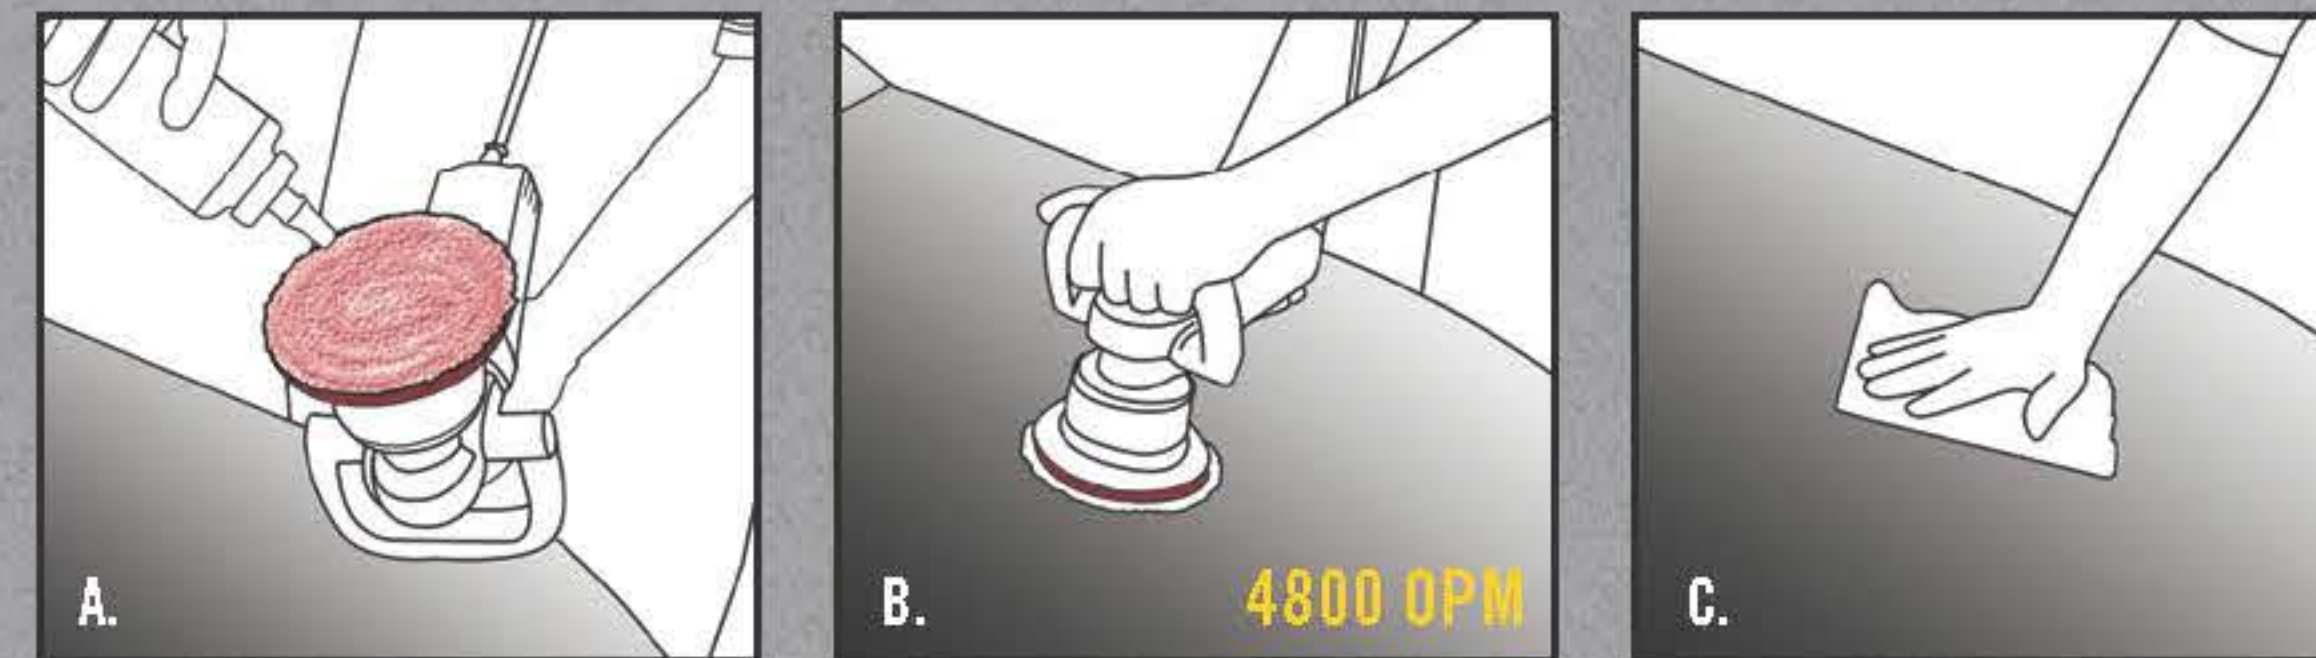


**If DA Haze occurs follow process with D302 before Step 2*

STEP 2. Paint Finishing & Wax Protection

You Need: D301 DMF Disc

- Prime DMF Finishing Disc with a uniform application of D301.
- Set DA Polisher to **3800 OPM**. Work surface, applying 2-3 light pressure passes.
- Wipe off residue using a Meguiar's Ultimate Wipe Detailing Cloth.

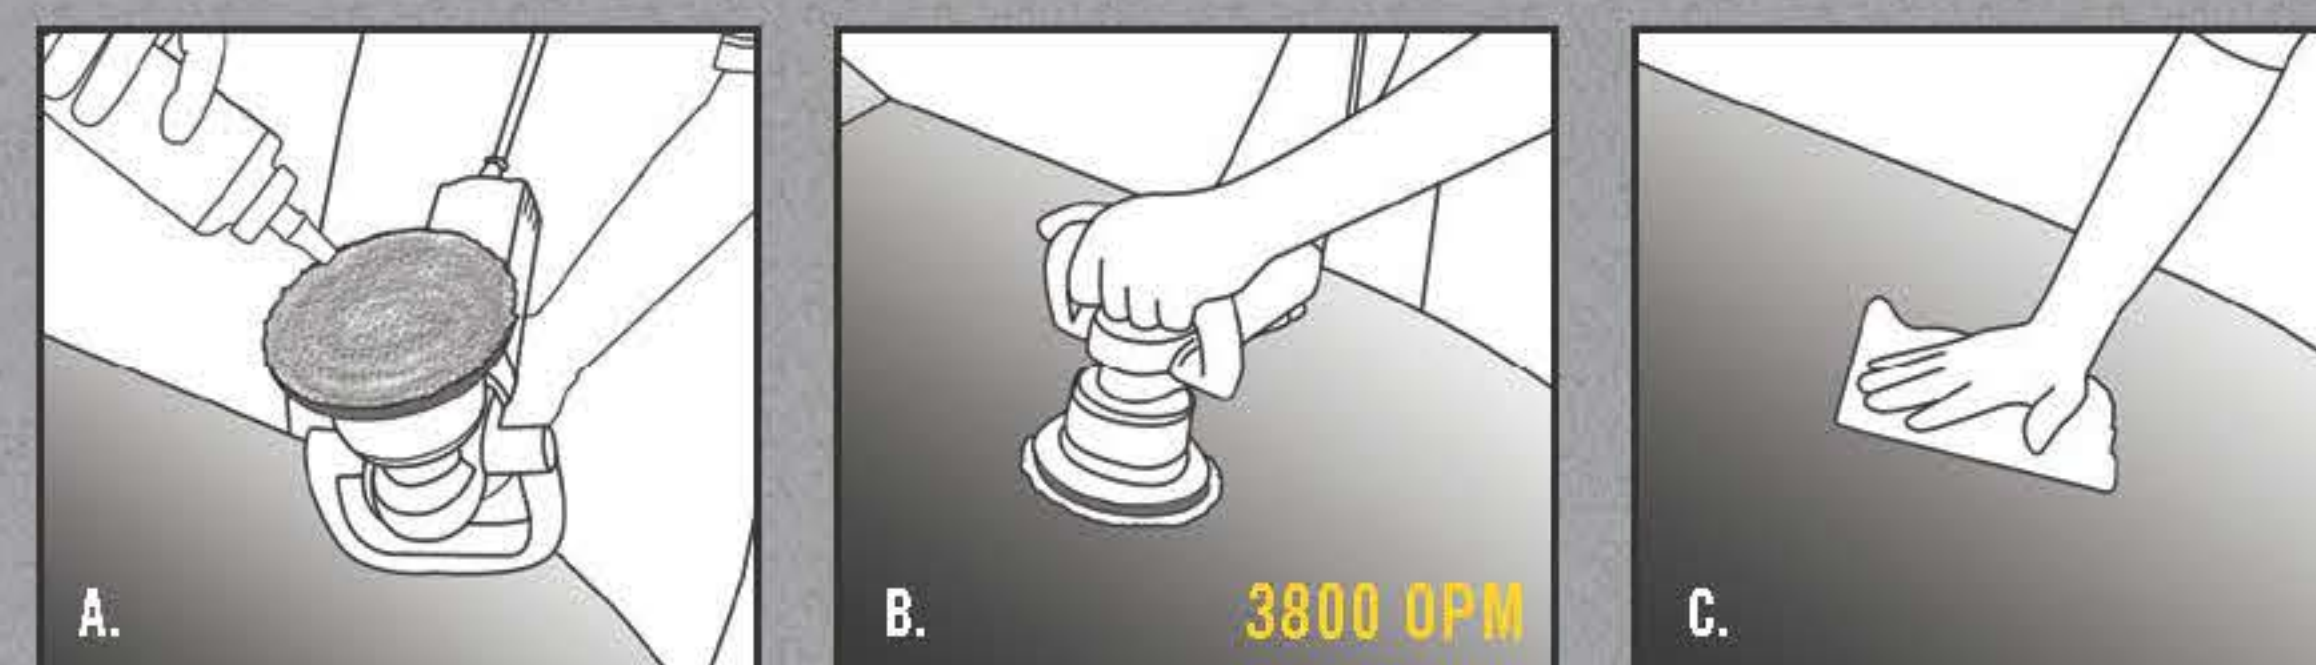

CARE & CLEANING INSTRUCTIONS

Clean disc frequently with compressed air using regulatory approved air nozzle or nylon pad brush.

LIGHT DEFECT REMOVAL


Swirls Light Scratches Final Finishing & Protection



STEP 1. Paint Correction & Wax Protection

You Need: D301 DMF Disc

- Prime DMF Finishing Disc with a uniform application of D301.
- Set DA Polisher to **3800 OPM**. Work surface, applying 2-3 light pressure passes.
- Wipe off residue using a Meguiar's Ultimate Wipe Detailing Cloth.

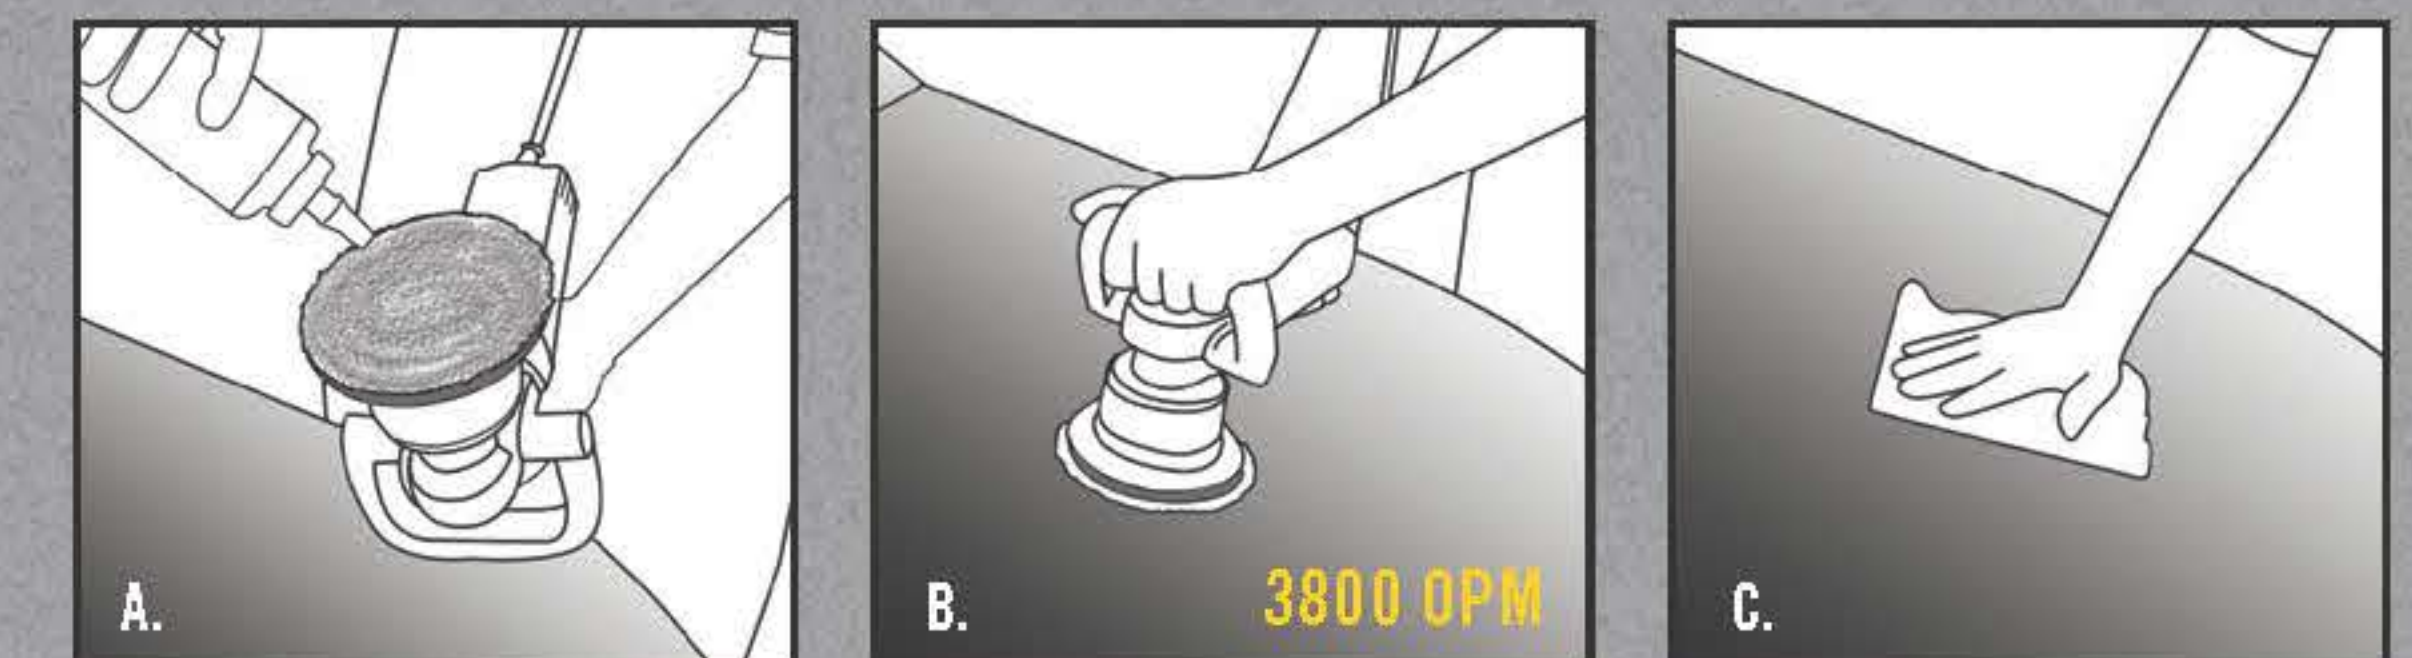


*D302 DA HAZE REMOVAL

OPTIONAL: DA Haze Removal / Paint Polishing

You Need: D302 DMF Disc

- Prime DMF Finishing Disc with a uniform application of D302.
- Set DA Polisher to **3800 OPM**. Work surface, applying 2-3 light pressure passes.
- Wipe off residue using a Meguiar's Ultimate Wipe Detailing Cloth.

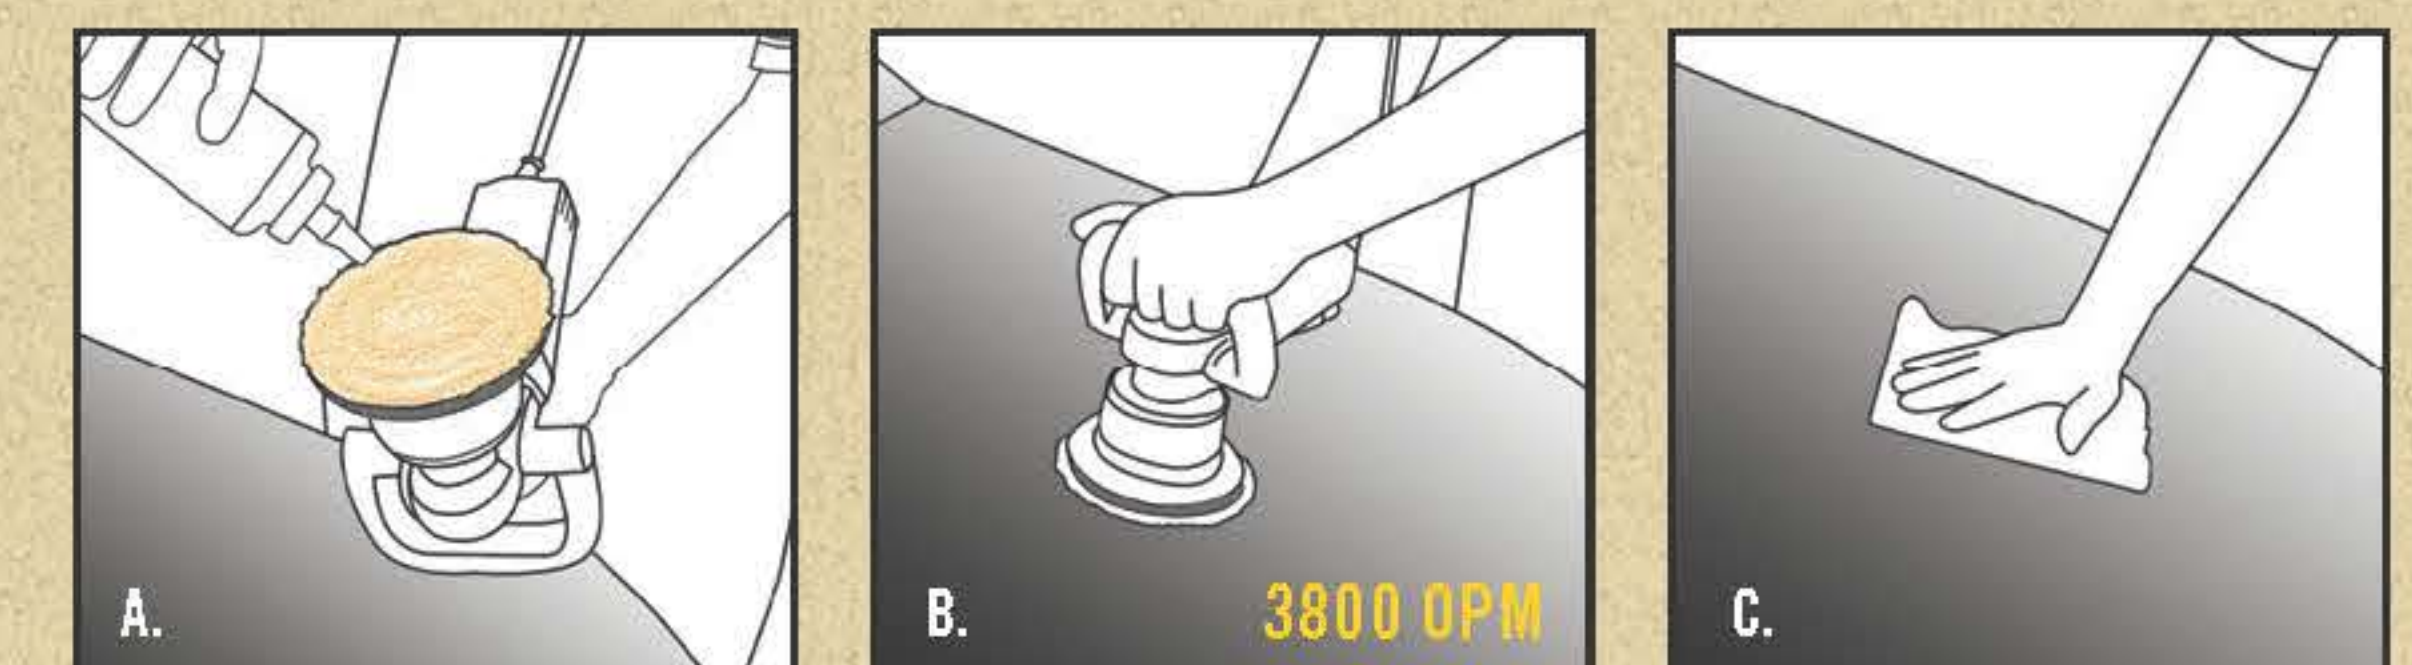

UPGRADED WAX PROTECTION

After you correct DA haze with D302, you can upgrade your wax protection by using your favorite Meguiar's wax or sealant.