



Features:

- 500 watts (250W RMS)
- Sealed Design
- Speaker impedence: 3.2 ohms
- Magnet Weight: 40.7 oz.
- Matt Black PP cone
- Black Ferrite magnet
- Santoprene surround
- Nickel plated copper terminals and insulated tinsel leads
- Meets ASTM B117 salt/fog testing specifications
- 9" mounting hole
- 4.8" mounting depth











Selectable Blue or White LED Light Kit

RG10HW

RG10SB

UMSW1000LK1




2602 Marina Drive • Elkhart, IN 46514 www.asaelectronics.com



MSW10

Universal Subwoofer

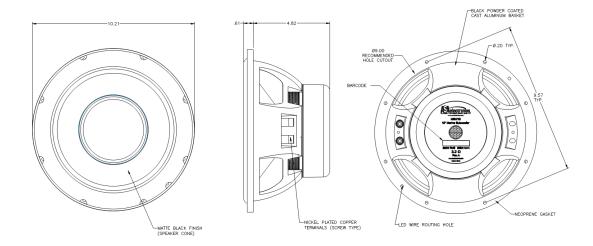

Specifications:	
General Specifications:	_
Woofer Size	10"
Woofer Material	Poly-propylene
Surround Material	Rubber
Voice Coil Size	2"
Magnet Weight	40.7 oz
Mounting Depth	4.83"
Hole Size	9"
Impedance	3.2 Ω
Temperature Range	-30°C - 70°C
Max RH	100%
Terminal Size	Accepts up to 8AWG
Performance Specifications	:
Frequency Response	20 Hz – 1 KHz
RMS Power Range	250 W
Max Power	500 W
SPL @ 1 W/ 1 M	85 dB
	31 Hz

