


Universal Sprayless Connector (USC) EPA Certified / CARB Approved

The Universal Sprayless Connector is a safe way to eliminate the spraying of fuel when connecting and disconnecting pressurized fuel hoses during fueling or maintenance.

- Attwood's Universal Sprayless Connector replaces traditional tank fittings and eliminates spray when connecting or disconnecting fuel fittings
- High strength body engineered to withstand the harsh marine environment
- Female hose and Male hose fittings compatible with 3/8" and 5/16" fuel lines
- Male tank fitting has pre-applied fuel-grade thread sealant to prevent fuel leaks and fits all standard 1/4" NPT fittings
- Male and female connectors include check valves that automatically close upon disconnecting
- High fuel flow fitting (less than .25kPa restriction at 50 liters/hour)
- Compatible with Ethanol blended fuels
- Compatible with all OEM brand engines

Description	OEM Part #	Part #
Male and Female w/Thread Sealant	—	8838US6
Hose Female, 5/16"-3/8"	001008200	8838HF6
Tank Male, 1/4" NPT w/Thread Sealant	001008199	8838TM6
Hose Male, 5/16"-3/8"	001011094	8838HM6

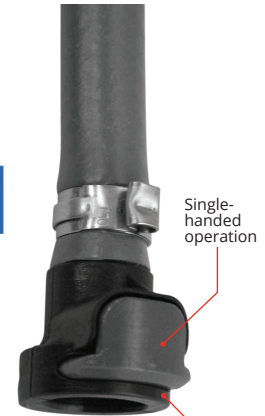


Single-handed operation



PRE-APPLIED FUEL-COMPATIBLE THREAD SEALANT

Tank fitting included with all EPA kits



Integrated check valves

Standard 1/4" NPT with pre-applied thread sealant



8838HF6



8838TM6



8838US6



8838HM6