


DIMENSIONS

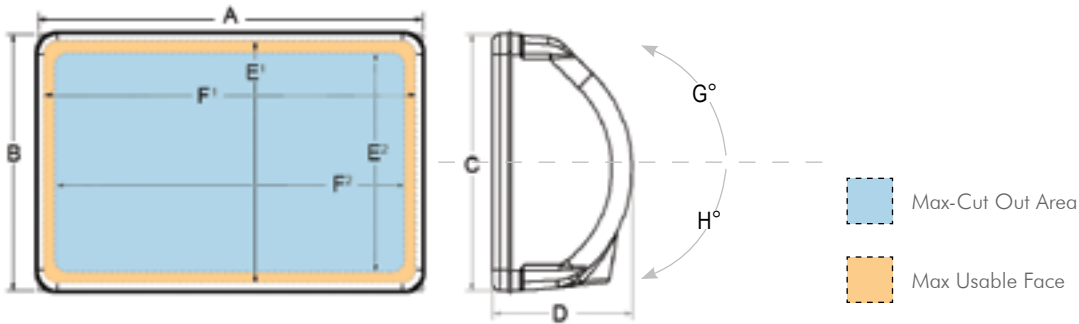

	A inch / mm	B / C inch / mm	D inch / mm	F ¹ inch / mm	E ¹ inch / mm	F ² inch / mm	E ² inch / mm	G	H
	Overall Dimensions			Max Usable Face		Max Cut Out Area			
SPOD									
SP1S	5.038 / 127.97	5.163 / 131.14	3.125 / 79.375	4.625 / 117.47	4.625 / 117.47	4.125 / 104.77	4.125 / 104.77	NA	NA
SP2S	12.305 / 312.55	7.555 / 131.14	5.08 / 129.03	11.75 / 298.45	7 / 177.80	11 / 279.40	6.125 / 155.57	26°	12°
SP3S	14.25 / 361.95	9.5 / 241.30	5.147 / 130.73	13.75 / 349.25	9 / 228.60	12.938 / 328.63	8.125 / 206.37	32°	30°
SP4S	17.5 / 444.50	12.75 / 323.85	5.7 / 144.78	16.938 / 430.23	12.25 / 311.15	16 / 406.40	11.25 / 285.75	10°	7°
SP5S	15.25 / 387.35	5.5 / 139.70	3.185 / 80.899	14.75 / 374.65	5 / 127	13.875 / 352.42	4.125 / 104.77	6°	6°

DPOD	A inch / mm	B / C inch / mm	D inch / mm	F ¹ inch / mm	E ¹ inch / mm	F ² inch / mm	E ² inch / mm	G	H
SP2P	12.305 / 312.55	7.555 / 131.14	5.08 / 129.03	11.75 / 298.45	7 / 177.80	11 / 279.40	6.125 / 155.57		
SP3P	14.25 / 361.95	9.5 / 241.30	5.147 / 130.73	13.75 / 349.25	9 / 228.60	12.938 / 328.63	8.125 / 206.37		
SP5P	15.25 / 387.35	5.5 / 139.70	3.185 / 80.899	14.75 / 374.65	5 / 127	13.875 / 352.42	4.125 / 104.77		

Accessory

SP1BOX	5.038 / 127.97	5.163 / 131.14	3.125 / 79.375	4.625 / 117.47	4.625 / 117.47	4.125 / 104.77	4.125 / 104.77		
---------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	--	--

SPOD & DPOD ACCESSORIES



SP1BOX allows you to mount additional instruments to your **SPOD** or **DPOD**.



Two **SP1BOX** on a **SPOD**.



Back view of **SP1BOX**.

SPOD & DPOD PART # GUIDE

	SPOD Part #	DPOD Part #
B&G		
Z8	SP3S	SP3P
Z12	SP4S	—
FURUNO		
GP150D, GP1670(F), GP1850F, GP1870(F), GP7800F	SP2S	SP2P
1623, 1715, 1724C, 1734C, GP1720C, MFD8	SP3S	SP3P
1824C, 1834C, 1934C, 1944C, 1954C, 1964C, GP1920C, TZT14, MFD12, DCU12, MU-120C	SP4S	—
GARMIN		
527, 547, 620, 640, 720, 721, 740, 741, 4008, 4208, 5008, 5208, 70s	SP2S	SP2P
6008, 6208, 8008, 8208	SP3S	SP3P
4010, 4012, 4210, 4212, 5012, 5212, 5015, 5215, 6012, 6212, 7012, 7015, 7212, 7215, 8012, 8212, 8215, 8015	SP4S	—
GEONAV		
G10	SP4S	—
G12	SP4S	—
HUMMINBIRD		
500, 700, 800, 900 Series	SP2S	SP2P
1100 Series	SP4S	—

	SPOD Part #	DPOD Part #
LOWRANCE		
HDS-5, HDS-5M, HDS-5X, HDS-7, HDS-7M (same for Gen2)	SP2S	SP2P
HDS-8, HDS-8M (same for Gen2)	SP3S	SP3P
HDS-10, HDS-10M (same for Gen2)	SP3S	SP3P
RAYMARINE		
e7, e7D, A50, A50D, A57D, e9, c95, e95, A70, A70D	SP2S	SP2P
C70, C80, E80, C90W, E90W	SP3S	SP3P
e12, e120, e125, e127, e140, C120W, C140, E120W	SP4S	—
SIMRAD		
NSS7	SP2S	SP2P
NSS8, NSE8	SP3S	SP3P
NSS12, NSE12	SP4S	—
SITEX		
EC5, EC7, SNS 700	SP2S	SP2P
EC11, SNS 1100	SP4S	—
STANDARD HORIZON		
CPN700i, CP190i, CP390i, CPF190i, CPF390i	SP2S	SP2P
CPN1010i	SP3S	SP3P
CP590, CPV550	SP4S	—
ICOM		
MXD5000	SP4S	—