

DS18
INFINITE

ATS10K
ULTRA THIN CAR JUMP STARTER
10,000 mAh

OWNER'S MANUAL

#POWERISINFINITE



FEATURES

- > Power Capability for Jump Start 12 Volt Vehicle. Can Start Gasoline Car under 3.0L
- > USB Charging Port Up To 2A. Supply Power for Mobile, MP3 / MP4, PSP, Camera and other Digital Devices
- > High Power S.O.S. LED FlashLight

SPECIFICATIONS

- | | |
|---------------------------|----------------------------|
| > Capacity Bank: | 10,000mAh |
| > Input: | 5V / 2A |
| > Output: | 5V / 2A for Mobile Devices |
| > Output: | 12V for Car Jump |
| > Start Current: | 200A |
| > Peak Current: | 400A |
| > Lifetime: | More than 3000 Cycles |
| > Charging Time: | 4 Hours |
| > Operating Temp.: | From -4 °F to 140 °F |
| > Size: | 135 x 78 x 20 mm |


ACCESSORIES INCLUDED

- > 4 in 1 Mobile Phone Connector
- > 1 x Battery Metal Clamps

ATS10K
#POWERISINFINITE



ATS10K GUIDED TOUR:

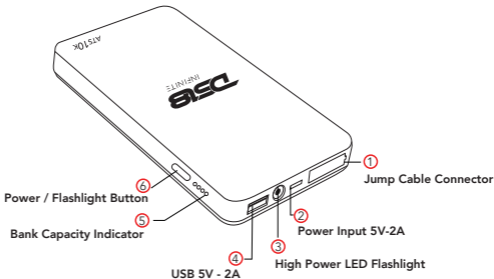

① Jump Cable Connector

Use this Port ONLY to Connect the Jump Start Cable with the Clamps to Start a Car

② Power Input 5V - 2AMP

Use this Port to Connect the Home or Car Adapter to Recharge the Device.

③ High Power LED Flashlight

5 Watts LED Bulb with Strober Function and S.O.S Sequence.

④ USB 5V - 2A

Use this Port to Charge Your Mobile Device such as Cellphones, Cameras, MP3, MP4 Players and any other device with a USB port Charge Input up to 2Amp.

⑤ Bank Capacity Indicator

This LED Bar Indicates the Level of Battery Capacity of the Jump Start. 4 Bars Indicate Full Capacity, 3 Bars Indicate Medium High Capacity; 2 Bars Indicate Medium Low Capacity and 1 Bar Indicates Low Capacity; It's time to Recharge the Device.

⑥ Power / Flashlight Button

Press once to Activate the Device in Order to use the USB Charger.
Press and Hold for 3 seconds to turn on Flashlight. Once the Flashlight is on, press the button to change modes. To turn the flashlight Off Hold the button for 3 seconds.