


P6106 VHF SEAMASTER PRO SERIES HELIFLEX ANTENNA 0.3M

**PACIFIC
AERIALS**

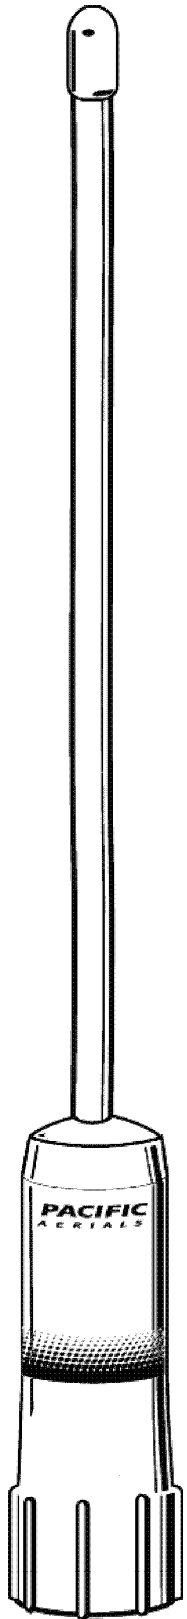

P6106

- Designed for short range boat to boat communications
- Unique Pro Series design allows the antenna to be removed and remounted at the owner's convenience
- Ideal for RIBS and other small craft
- The flexible radome stands up to the most rugged environment
- The P6106 heliflex can be interchanged with the P6101 (1.8m), P6102 (2.5m) or P6182 (1.0m) VHF Pro Series antennas - they all fit on the same mounts
- The FastFit jack (P1212) on the Pro Series mounts makes installation easy.




P1212




P1217

- A FastFit UHF plug (P1217) is supplied with the Pro Series mount, and simply screws onto the FastFit jack

MOUNTS FOR P6106




P6111



P6113



P6161




P6115

TWIN P6106 WITH

- P6107 AM/FM SeaMaster Pro Series Heliflex antenna 0.3m
- P6108 CDMA SeaMaster Pro Series Heliflex antenna 0.3m
- P6109 GSM SeaMaster Pro Series Heliflex antenna 0.3m

	P6106
Frequency	VHF: 156-162 MHz
Radome	Nylon
Ferrule	Glass filled nylon
Antenna Type	Helical
Gain	1.2dBi
"Marine Gain"	2.4dB
Typical VSWR 156.8MHz	<1.7:1
DC Meter Reading	Short Circuit
Height / Weight	0.3m / 98g
Power	50W
Impedance	50 ohms
Cable (on mount)	5m RG-58AU

VSWR GRAPH

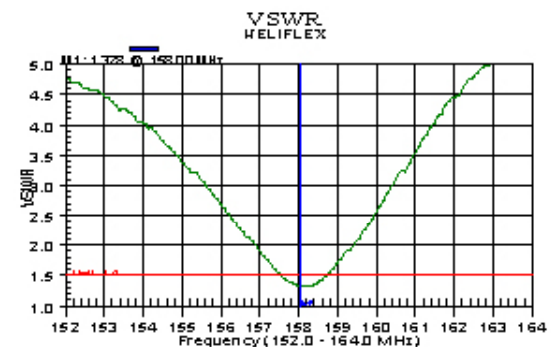

Resolution: 130
Date: 07/12/2004

IC: LON(C0A3D)
Time: 10.18.36

CW: OFF

8.02.10



PACIFIC AERIALS

11B Ra Ora Drive East Tamaki 2013
PO Box 38421 Howick 2145
Auckland New Zealand

PHONE: +64-9-253 9450
FAX: +64-9-271 6483
EMAIL: info@pacificaerials.com
WEB: www.pacificaerials.com