

Technical Data

Part #
LLB-53BA-81-00
Anchor Light / Strobe



ULTRA LIGHT NAVIGATION FIXTURE 2 NAUTICAL MILE

Lunasea's Anchor/Strobe LED navigation models have the added features that you asked for, and more. This lightweight fixture, made of machined aluminum weighs just 140 grams (4.9 ounces). We've added emergency strobe, auto daylight turnoff for anchor, and a removable bird spike. The waterproof connector is only 0.38 inch wide for easier cable routing.

The glass lens assures excellent light transmission for the life off the product. With state-of-the-art EMI circuitry this lightis designed for minimal interference with VHF equipment. And last but not least, we hard anodized the unit to withstand harsh saltwater environments.

3 year warranty.

- Anodized Machined Aluminum
- Ultra-light Weight, only 4.9 Ounces
- Miniature Waterproof Connector
- Glass Lens
- Maintains Full Brightness as low as 10VDC
- Removable Anti-Bird Spike
- Threaded hole can mount Davis™ Windex on top of light

Voltage Range: 10-40VDC

Power Consumption: 4 Watt

Light Output: 2NM

Enclosure: Machined Aluminum

Removable Aluminum Bird-Spike

Wiring: 3 Wire

Infrared Light Sensor Daylight Auto-off for Anchor

(does not effect strobe)

Please note: The black color may change, this is normal & in no way does this affect the anodize protection of the metal.

NOTE: BLOCK EXTERNAL LIGHT WHEN TESTING IN DAYLIGHT.

WIRING DIAGRAM

WIRE CONFIGURATION


+ RED: N/A + GREEN: Anchor + RED & + GREEN: Strobe

- BLACK (ground)

DIMENSIONS

1.5 INCH (38MM) 3.1 INCH (79MM) 2.5 INCH (65MM)

MOUNTING

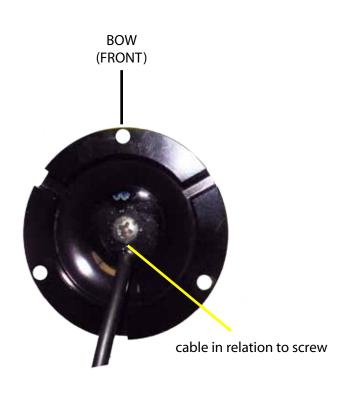

WATERPROOF CONNECTOR

