




TRIDENT MARINE®

TRIDENT WET EXHAUST ELBOWS

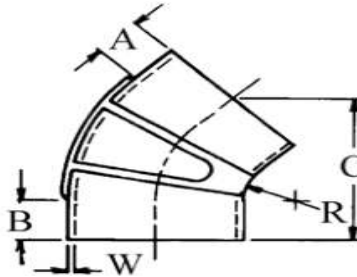

TRL 45° Series

Trident EPDM marine wet exhaust connections. They are molded of high temperature black EPDM rubber with a smooth bore and cover; except elbows of 6" I.D. or bigger have molded reinforcing ribs on the outside. These elbows have excellent resistance to ozone, salt water, diesel fumes and splash, cold, heat, and aging. Exceeds (SAE J2006-R1, and ABYC & NMMA P-1 exhaust standards). Black High Temp EPDM Rubber 250°F (121°C) max continuous. 5 Year Warranty.

Specifications

Construction:

High Temp EPDM Rubber.

Color: Black

Reinforcement: Reinforcing Ribs on 6" I.D. and above

Temperature Range: up to 250°F (121°C)

Part Number	ID		OD		A		B		C		W		Elbow Degree	Weight	
	in.	mm.	in.	mm.	in	mm	in	mm	in	mm	in	mm		Lb/Ea	Kg/Ea
TRL-345	3	76.2	3.5	88.9	1.5	38.1	1.5	38.1	5.5	139.7	0.25	6.35	45°	0.6	0.27
TRL-3545	3.5	88.9	4.0	101.6	1.5	38.1	1.5	38.1	5.5	139.7	0.25	6.35	45°	0.7	0.32
TRL-445	4	101.6	4.5	114.3	1.5	38.1	1.5	38.1	5.5	139.7	0.25	6.35	45°	0.95	0.43
TRL-4545	4.5	114.3	5	127	1.5	38.1	1.5	38.1	5.75	146	0.25	6.35	45°	1.0	0.45
TRL-545	5	127	5.5	139.7	1.62	48.1	1.62	48.1	5.75	146	0.25	6.35	45°	1.05	0.478
TRL-645	6	152.4	6.5	165.1	2	50.8	2	50.8	6.5	165	0.25	6.35	45°	1.95	0.88
TRL-845	8	203	8.74	222.0	2.25	57.2	2.25	57.2	8.25	209.5	0.37	9.4	45°	4.3	1.95
TRL-1045	10	254	10.74	272.8	2.25	57.2	2.25	57.2	10.5	266.7	0.37	9.4	45°	6.45	2.93

*To add 4 x #720 series Stainless Steel T-Bolt Clamps, add "SS" to the end of the part number. (TRL-345SS)